



NEW


# LOBA Style System

## Seamless mineral flooring

StyleFloor is the smart solution for modern floor renovations with minimal effort and maximum effect. The seamless mineral floor material is applied directly onto existing substrates such as tiles, PVC, linoleum, screed, or leveling compounds – and then finished.

clever renovation,  
strong design


LOBA – Your partner for surface finishing and care



# Design reimagined – color meets texture

Ten nature-inspired shades open up a wide range of design options, from subtle to characterful. The StyleColor additive is mixed directly into the StyleFloor liquid component – for a consistent, through-colored appearance and maximum design freedom.

By choosing the application technique – with brush or trowel – you can create individual textures that add depth and a unique feel to the floor.

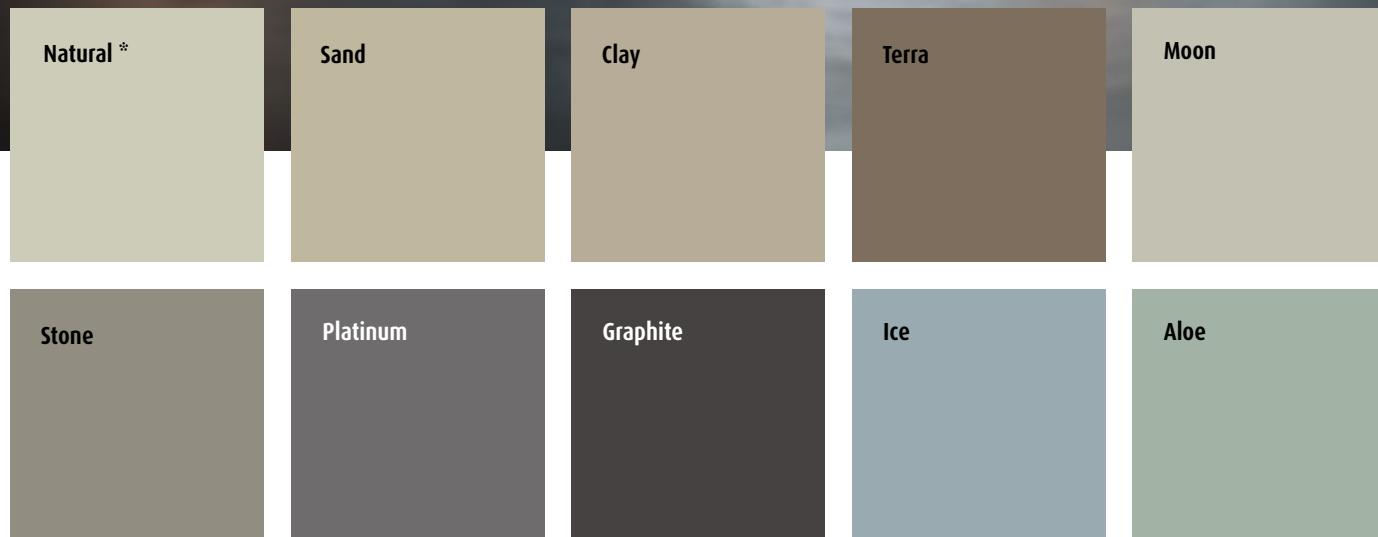

\* Original StyleFloor color, without addition of StyleColor

## TROWEL LOOK



The classic spatula technique gives the floor its lively character. Every floor is truly one of a kind.

## BRUSH LOOK



Targeted brushing creates special effects. The surface gains depth and dynamic character.

# LOBA Style System – the smart solution for modern floor renovations



## No demolition, fast drying times

StyleFloor saves time and significantly reduces downtime.



## Versatile application on different substrates

Whether tiles, PVC, linoleum, screeds, or leveling compounds – StyleFloor bonds reliably.



## Cost-efficient and ideal for renovations

The low material application of StyleFloor in a single layer not only ensures minimal build-up height, but also maximizes cost and time savings – ideal for budget-oriented projects.



## Individual design options

Different colors, textures, and surface properties allow customized concepts tailored to project requirements..



## Sustainable and resource-friendly

Existing floors remain in place – saving waste, energy, and materials. Low-VOC products ensure pleasant, safe application and fast usability.



**Seamless mineral flooring. For a stylish, spacious look: ideal for renovations and customized design.**



# Simple structure – Well thought out, coat by coat

The LOBA Style System makes modern floor construction easy. The four optimally coordinated coats ensure a safe, long-lasting result – from the preparation coat with StylePrep to individual design with StyleFloor and StyleColor, primer with StyleBase, and durable finish with 2K Style. By applying StyleFloor in a single layer, time-consuming work steps are saved.

The system can be used on many existing substrates – such as tiles, PVC, linoleum, leveling compounds, or screeds. For a particularly smooth surface on tiles or screeds, we recommend an additional leveling compound for substrate preparation.



For a smooth final surface, a leveling compound should also be used.  
Residual impression behavior according to EN ISO 2434-1  $\leq 0.15$  mm, bonded.



LOBA recommends Wakol leveling compounds:

WAKOL Z 715  
WAKOL Z 610  
WAKOL Z 615

WAKOL Z 625  
WAKOL Z 630  
WAKOL Z 635


WAKOL A 830  
WAKOL Z 515



## Alternative:

**2K Resist** for high resistance to common household chemicals, disinfectants, and hair dyes.

**EasyFinish Neo** for the simplicity of a 1K finish – based on renewable raw materials.

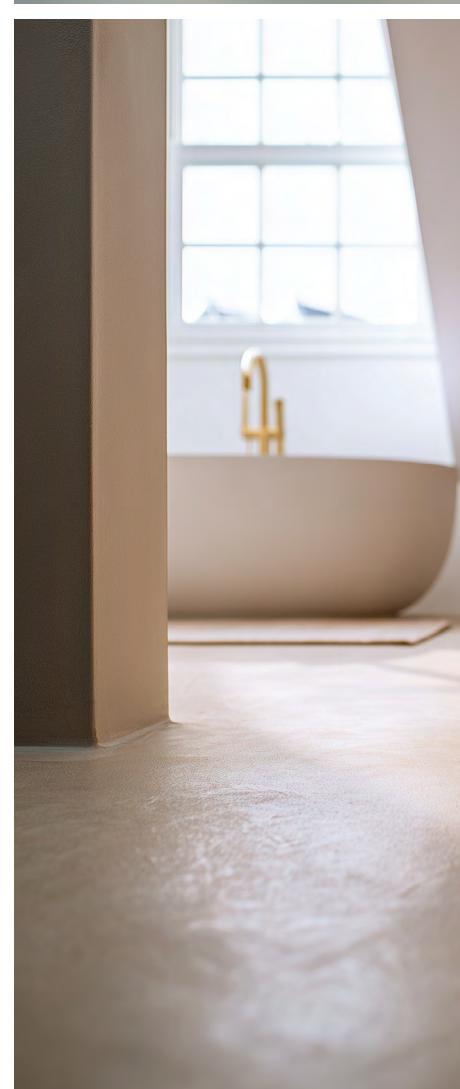



# Step by step for optimal results

- Prepare the substrate and apply StylePrep according to the given processing conditions. Drying time: at least 2 hours.
- Shake the liquid component well and pour into a clean mixing bucket.
- For colored designs: Add LOBA StyleColor to the LOBA StyleFloor liquid component before mixing.
- Add the powder component and stir with a double paddle mixer for 3 minutes until lump-free. Stir again after a 2-minute maturation time.
- The mixture can be used for approx. 40 minutes.  
Note: High temperatures shorten the processing time.
- Apply a layer using a LOBA Trowel blade S1 and smooth with a LOBA Texturing brush or Venetian trowel.
- Allow to dry for at least 12 hours.
- Important: Only walk on with shoe covers! Dirt or humidity may remain visible later.
- Sand the surface with a single-disc machine and DoubleDisc P 120.
- Then prime with StyleBase and seal with 2K Style.

Please refer to the LOBA Technical Information as well as the LOBA Technical Tips & Tricks.



## Suitable tools

The tools specially designed for StyleFloor ensure even application and individual design options.



Master trowel



Trowel blade S1



LOBA Texturing brush



Venetian trowel

## Cleaning & Care:

Simply scan the QR code to access the care instructions for finished mineral floors.



© registered trademark at least in Germany


Subject to change



LOBA



LOBA GmbH  
D-71254 Ditzingen  
Tel. +49 7156 357 0  
[www.loba.de](http://www.loba.de)



Wakol

Wakol GmbH  
D-66954 Pirmasens  
Tel. +49 6331 8001 131  
[www.wakol.com](http://www.wakol.com)



LOBA Art. No. 84731-EN / 02 | 2026  
Wakol Art. No. 3002145