



# PRODUCTS 2026

LOBA – Your partner for surface finishing and care

# New products in 2026

NEW



## 2K Resist CHEMICALS DON'T STAND A CHANCE!

Water-based 2K polyurethane finish for projects requiring superior chemical resistance.

This semi-matt, water-based finish has been specially developed for environments with high chemical exposure. Thanks to its innovative formulation, the coating provides long-lasting protection for linoleum and PVC coverings, parquet and wooden floors, as well as mineral trowelled flooring, effectively protecting them from numerous chemicals. Thanks to its high mechanical resistance, 2K Resist is perfectly suited for a wide range of applications – from private interiors to public or commercial spaces, such as medical practices, cafés, or retail shops. [See Page 23](#)


## Stain FASTESt DRYING STAIN ON THE MARKET.

For hardwood flooring.



With an incredible 1 hour dry time, LOBA Stain allows your project to be completed faster, saving you time, money, and earlier access to your floor. Easy to apply using either the rag on, rag off technique or by buffing. Available in over 20 vibrant colors.

[See Page 15](#)

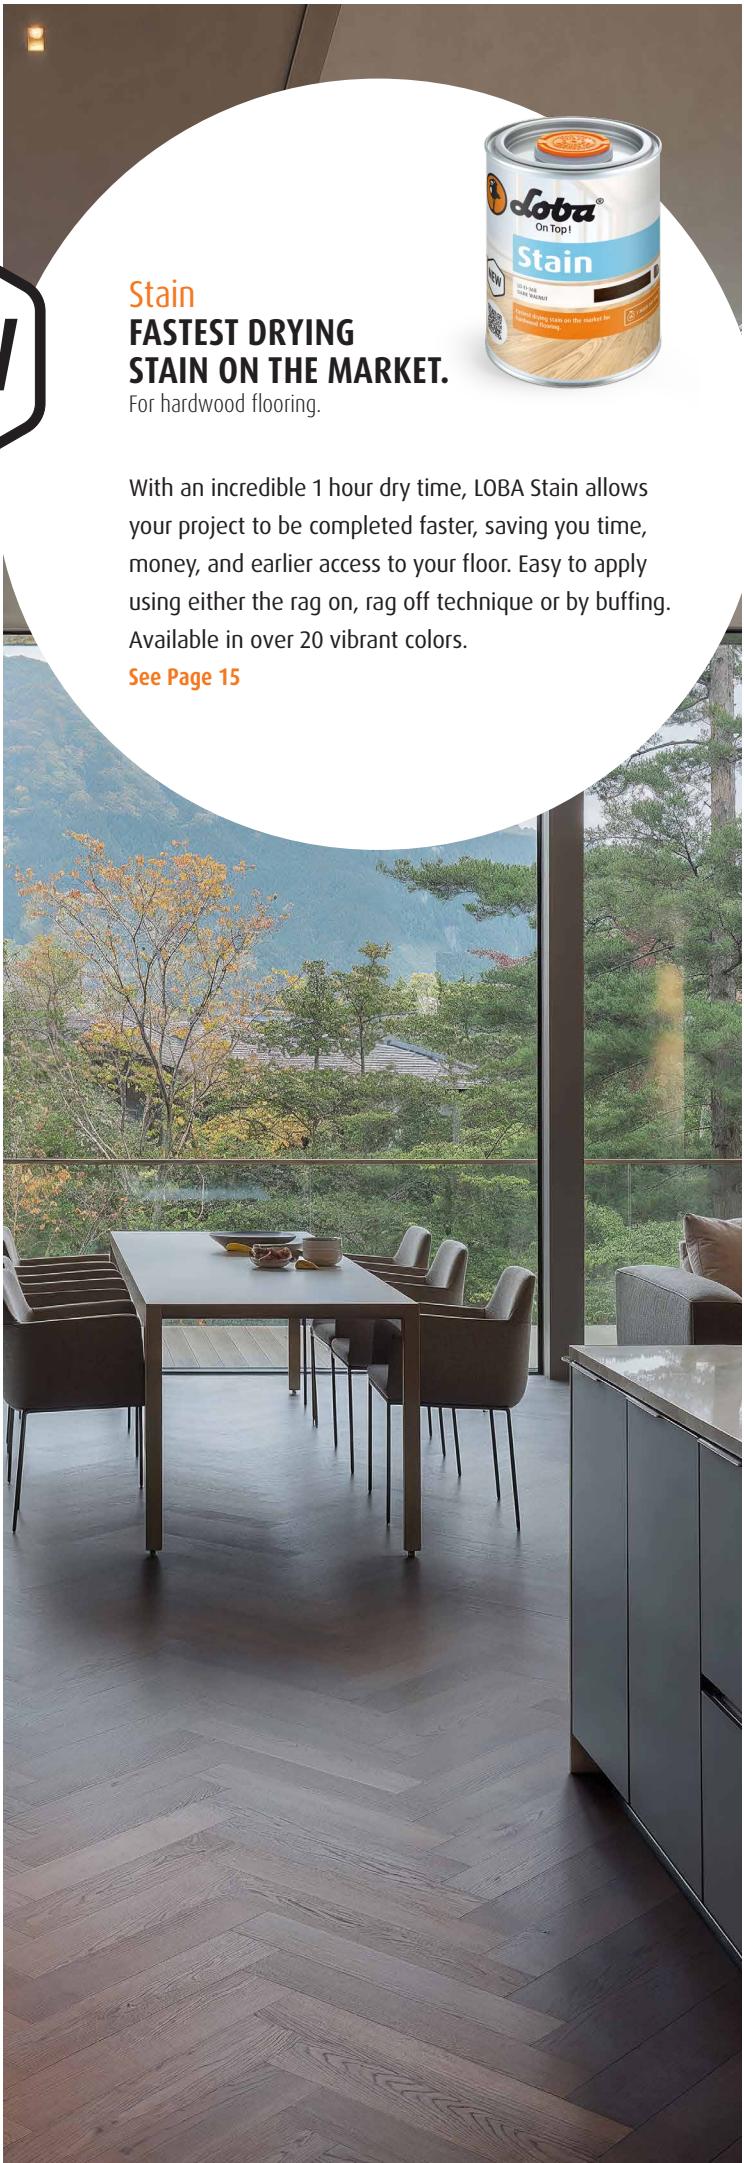

# Contents

## HARDWOOD FLOORS

Joint Fillers	10-11
Primers & Stain	12-15
List of Wood Species for Primers & Finish Systems	16
Application Tools for Primers & Finish Systems	17
1K Finishes	18-21
2K Finishes	22-24
Special Products	25
Additives	26-27
High Solid Oils	28-32
Hard Wax Oils	33-35
List of Wood Species for Oil & Wax Systems	36
Application Tools for Oil & Wax Systems	37

## SPORTS FLOORING

Finishes	38-39
Cleaning & Care	40-41

## RESILIENT FLOORING

Finish	42-43
--------	-------

## TROWELLED FLOORING

Primer & Finish	44-45
-----------------	-------

## Use our download area:

- Set-up recommendations
- Technical information
- Application videos

→ [www.loba.de/int\\_en/downloads](http://www.loba.de/int_en/downloads)



## OUTDOORS

Preparation & Finishes	46-47
Oils	48
Cleaning & Care	49

## CLEANING & CARE

Maintenance Cleaning	50-51
Finished Floors	52-54
Oiled/Waxed Floors	55-57

## HOME

Cleaning & Care for the Home	58-63
------------------------------	-------

## ABRASIVES & PADS

Sanding Recommendations	65
Ceramic	66
Zircon	67
Other Abrasives & Pads	68

## TOOLS & ACCESSORIES

Application Tools	70-72
Range of Use - Rollers	73
Accessories	74-75
Joint Sealer & Repair	76



LOBA On Top



lobaontop1922

[www.loba.de](http://www.loba.de)

# LOBA On Top!

LOBA loves beautiful floors. With over 100 years of experience, we offer you innovative premium products for the creation, finishing and maintenance of surfaces made of wood and cork, as well as resilient and mineral floorings. LOBA attaches the highest value to user-friendly, safe and sustainable products. Out of responsibility towards people and nature, we have long focused on the development of environmentally compatible, solvent-free systems – for a living environment that makes us all feel good.



You can find all of LOBA's milestones since 1922 here.



## ROOM FOR INNOVATION

LOBA's new Center for Research & Development is being established at the company's headquarters in Ditzingen. Built according to the DGNB Gold Standard, the three-story reinforced concrete building covers a total area of 3,500 m<sup>2</sup> and brings together product development, application technology, and production logistics – including a spacious warehouse – all under one roof.

## TRADITION MEETS THE FUTURE

Michael Fischer, son of the company's founder and long-standing CEO of LOBA, is retiring and transferring his shares to WAKOL. Since 2024, LOBA and WAKOL have been wholly owned by the ARDEX Group.

## 100 YEARS LOBA

"Creating the future together" – LOBA celebrates 100 years of technical excellence and innovation, passion, and outstanding service. LOBA On Top! Produced in Germany – made for the world.



## INVESTMENT IN THE FUTURE

The new logistics and training center in Ditzingen, Germany is opened.



## PARTNERSHIP WITH WAKOL

The product range includes floor stains, floor cleaners, floor polish, ski wax, shoe polish, leather grease, and household candles. Already in September 1922, 20 candle machines produce 85 tons of household candles.



## FOUNDING

On April 13, 1922, Wilhelm Hornung and Dr. Max Fischer found Vereinigte Wachswarenfabriken AG Hornung und Dr. Fischer in Ditzingen, near Stuttgart, Germany.

2025

2024

2023

2022

2015

2006

1995

1922

MILESTONES

## EVOLUTION OF WOOD FLOOR FINISHES

Powerful, sustainable, and easy: market launch of EasyFinish Neo – the world's most sustainable 1K wood floor finish with 2K performance. Formulated with renewable raw materials, it delivers a 25 % CO<sub>2</sub> reduction compared to the industry standard.



## INVISIBLE SURFACE PROTECTION

Market launch of the invisible water-based surface protection 2K InvisibleProtect. Thanks to its innovative technology, it achieves a look and feel that appears even more natural than raw wood.



## INNOVATION

With the introduction of the legendary WS 2K 95, the world's first water-based 2K hardwood floor finish system, LOBA sets a new standard in the industry. .



Durchbruch in eine neue Wasserlack-Qualität...

# Excellent! Sustainability at LOBA

When it comes to sustainability, LOBA solutions are the perfect companion for every step of the process – not just for new-builds, but also and especially in refurbishment projects. At the company level as well, we've set ourselves some lofty goals.



## REFURBISH INSTEAD OF USING NEW

Convince your customers to give hardwood flooring a second chance! Old flooring, when restored to a high standard, is often a beautiful alternative to new flooring. It also tells a story, and not infrequently turns out to be the more economical solution. By far, however, it's the more sustainable option: Renovating a hardwood floor conserves resources and is environmentally friendly. It also avoids waste and produces less CO<sub>2</sub> than a complete replacement.

## PRODUCTS INSPIRED BY SUSTAINABILITY


As part of our traditional role as a pioneer in the development of water-based 2K finishes, sustainable formulas can be found throughout the range of LOBA finishing products – out of responsibility towards our customers, end users and employees. Numerous labels, such as the coveted GEV-EMICODE®, the French "Emissions dans l'air intérieur" seal, or the Scandinavian "M1" mark, bear testimony to our commitment that extends far beyond national borders.

## SUSTAINABLE AND FAIR: OUR DELIVERY PROCESSES

To make sure our suppliers meet our rigorous standards, they agree to our code of conduct, which requires them to understand, follow, and champion our values and principles in environmental protection, social responsibility, and governance. As part of this commitment, we have also dedicated ourselves the United Nations' Sustainable Development Goals.

## ISO-CERTIFIED QUALITY AND ENVIRONMENTAL MANAGEMENT

LOBA has been DEKRA-certified since 2011 as compliant with ISO 9001 and ISO 14001. These certificates stand for high standards in quality and environmental management and confirm the ongoing improvement of our performance in terms of process, product and service quality as well as environmental protection. As a result, we operate a solid business with long-term personnel planning – and 100% of our electricity comes from green energy sources.

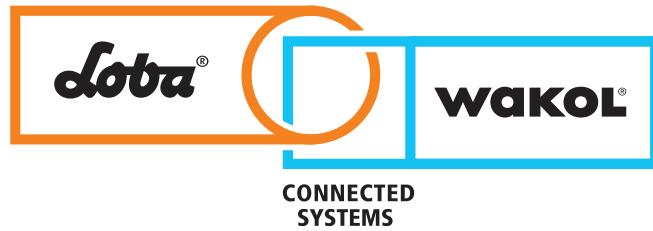

# A STRONG CONNECTION FOR YOUR SUCCESS

**Connected Systems**  
Perfect results  
for your projects

## Your benefits with LOBA Wakol Connected Systems

- Perfectly coordinated products
- Maximum safety during application
- Successful handling in a tried-and-tested, guaranteed system
- Exclusion of interactions between oils/finishes and adhesives
- Avoidance of dark run-ins at short end joints
- Avoidance of dark joints, since there is no softening of the finish layer
- Long-term quality assurance through regular tests in the event of formula adjustments

We care about your success!



LOBA   FINISHES		WAKOL									
		1K ADHESIVES					2K ADHESIVES				
1K FINISH	EasyFinish Neo	✓	✓				✓	✓	✓	✓	✓
	EasyFinish	✓	✓				✓	✓	✓	✓	✓
	Speed	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Viva	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Life	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	2K FINISH	2K Supra A.T.	✓	✓	✓	✓	✓	✓	✓	✓	✓
2K FINISH	2K Resist	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	2K InvisibleProtect	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	2K Duo	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	2K Fusion	✓	✓				✓	✓	✓	✓	✓
	2K Drive	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	2K ImpactOil	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LOBA   OILS & WAXES	2K ImpactOil Color	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Akzent 100 Oil	✓	✓				✓	✓	✓	✓	✓
	HardwaxOil EcoPlus	✓	✓				✓	✓	✓	✓	✓
	HardwaxOil	✓	✓				✓	✓	✓	✓	✓
	HardwaxOil Nature	✓	✓				✓	✓	✓	✓	✓
		✓	✓				✓	✓	✓	✓	✓



WAKOL		
LEVELLING COMPOUND		
Z 610	Z 615	Z 625
✓	✓	✓

LOBA	FINISH SYSTEM	StyleBase and 2K Style



Updated October 2025 | Subject to change | Updates can be found at [www.loba.de](http://www.loba.de) and [www.wakol.com](http://www.wakol.com)  
 Professional use of the listed Connected Systems products is a key factor for successful results. Please take note of the respective technical data sheets of the products used.

**wakol®**  
Anspruch verbindet

# LOBA loves hardwood floors

With LOBA premium systems, you can finish and protect hardwood floors in first-class quality. Our finishing products and oils offer ideal protection against dirt, wear, chemicals, and moisture and are perfect for finishing hardwood floors and cork. Solutions from LOBA are not only extremely robust and durable; they also offer an attractive appearance that accentuates the hardwood floor's natural charm.



Project: Hildene Road, Südafrika, Privathaus

Contractor: Zimbo's Flooring & Decking Solutions

Product: Viva matt





## Preparation is everything

With our water-based joint fillers, even large joints in hardwood flooring can be filled beautifully and small imperfections touched up, thereby resulting in the perfect color match, even on exotic wood.

Regardless of whether the surface of the hardwood floor is treated with impregnating oil, hardwax oil or finish, with LOBA fillers for your floor covering, you're ready for any challenge.



## EasyFill

Water-based binder with high filling capacity.

- Easy to work with
- Closes even wider joints by one-time application
- No subsiding of the filler in the joint
- Very fast drying
- Excellent sandability; clearly visible and low adhesion on sanding paper
- Excellent color scheme for oiled and finished surfaces
- Applicable to all common European and exotic wood types
- Odor neutral

ART.-NO.				GISCODE
11039-000000	1l/5l	12/4	480/128	W2+

APPLICATION DEVICE	
Trowel	100
Wood	



## VivaFill

High-yield water-based binder.

- Extremely economical to use
- Odor neutral
- Rapid drying
- Easy and safe application
- Low VOC content

ART.-NO.				GISCODE
11511-000000	5l	4	128	W2+

APPLICATION DEVICE	
Trowel	50
Wood	




## Fugenkitlösung

Binder with optimal colouring.

- Rapid drying
- Excellent sanding properties
- Exceptional color fidelity even with exotic wood species
- Prevents finish shrinkage

ART.-NO.				GISCODE
11085-100000	5l/12l	4/-	120/42	G2

APPLICATION DEVICE	
Trowel	100
Wood	

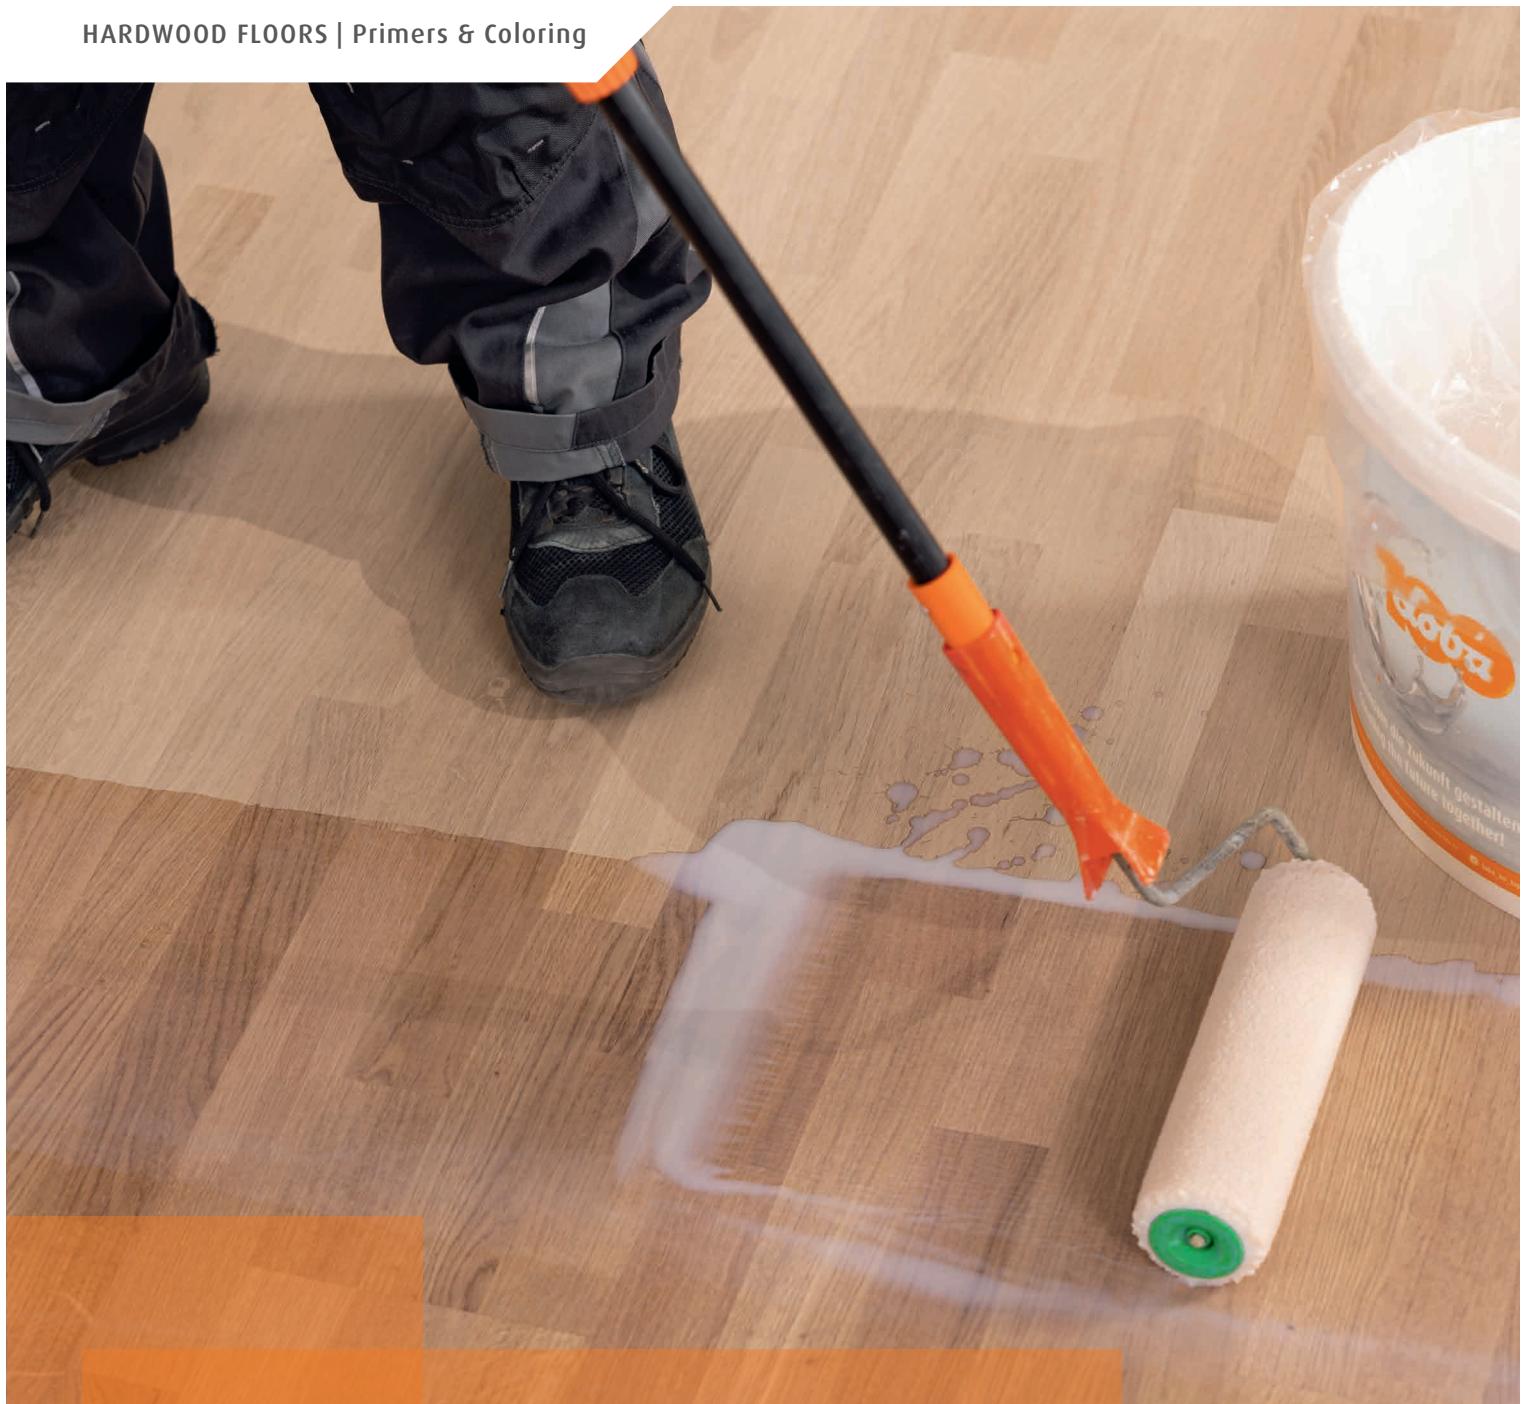

## Primers – the optimal pre-treatment

Play it safe and prepare hardwood flooring with water-based primers from LOBA. These not only improve the adhesion on the surface, but also seal in timber constituents and reduce the risk of side bonding and lap marks. LOBA primers, depending on the selection, can be used on European and exotic hardwoods, as well as in gyms and multi-purpose halls. If you want to color and subsequently finish hardwood flooring, you can create color accents with a special pre-treatment in order to produce a customized room setting.



## EasyPrime

Light ambering primer for wooden floors, suitable for almost all wood species.

- Used on millions of m<sup>2</sup> worldwide every year
- All-rounder offering maximum processing reliability
- Premium quality at a fair price
- Reduces side bonding
- Suitable for use with practically all European and exotic woods, as well as in sports and multipurpose halls

ART.-NO.	■	□	■■■	GISCODE
11036-900000	1l/5l/10l	12/4/-	480/128/60	W3+

APPLICATION DEVICE	ml/m <sup>2</sup>
Universal 100 roller	100 - 120
Microfibre 100 - 120 roller	
Trowel (2 in a cross-wise pattern)	40 - 60
Wood	
 	



## VivaPrime

Ambering primer for wooden floors, suitable for light wood species.

- Reduces side bonding
- Suitable for renovation and new installation
- Good price/performance ratio
- Easy and safe application

ART.-NO.	■	□	■■■	GISCODE
11518-000000	5l/10l	4/-	128/60	W2+

APPLICATION DEVICE	ml/m <sup>2</sup>
Universal 100 roller	100 - 120
Microfibre 100 - 120 roller	
Trowel (2 in a cross-wise pattern)	40 - 60
Wood	
 	



## PrimaSeal Plus

Ambering primer for wooden floors, suitable for almost all wood species.

- Easy and safe application
- Excellent blocking of wood ingredients and old contamination
- Intensifies the color of the wood
- Good price/performance ratio

ART.-NO.	■	□	■■■	GISCODE
11033-600000	5l	4	128	G1

APPLICATION DEVICE	ml/m <sup>2</sup>
Universal 100 roller	100 - 120
Wood	



## 2K Intensive

Heavy ambering high-solid 2-component oil-based primer for wooden floors, suitable for almost all wood species.

- Significant deepening of the wood color
- Cobalt and butanoxime-free
- Combines oiled look with the advantages of finished surfaces
- Easy and safe application
- No roughening of the wood
- No side-bonding effect

ART.-NO.	VARIANT				GISCODE
11053-000000	Transparent	600 g/2.5kg	4	320/120	Ö40/DD+

### APPLICATION DEVICE

g/m<sup>2</sup>

Microfibre 60 - 80 oil roller | 20 - 40

### Wood



## 2K Intensive Color

Coloured high-solid 2-component oil-based primer for wooden floors, suitable for almost all wood species.

- All variants can be mixed with each other
- Cobalt and butanoxime-free
- Easy and safe application
- Versatile design options
- No roughening of the wood
- No side-bonding effect


ART.-NO.	VARIANT				GISCODE
11053-...	Various colors	2.5kg	4	120	Ö40/DD+

### APPLICATION DEVICE

g/m<sup>2</sup>

Microfibre 60 - 80 oil roller | 20 - 40

### Wood



All colors are also available in sample cans.




Classic Grey



Country White



Ebony




Golden Oak




Gunstock



Jacobean



Mesquite Red




Provincial



Sedona Red



Special Walnut



Weathered Oak



Chalk

Color samples are not binding



## Stain

Alcohol-based colouring for wood flooring.

- 1 hour dry time
- Easy and safe application
- Can be finished with LOBA finish and oil systems
- No lingering odor
- Non-combustible
- Colors can be mixed to create custom shades

### APPLICATION DEVICE


Microfibre applicator  
Lint free cotton cloth

ml/m<sup>2</sup>

45 - 60

Wood

ART.-NO.	VARIANT	750 ml	6	432	GISCODE
11525-...	Various colors				G1

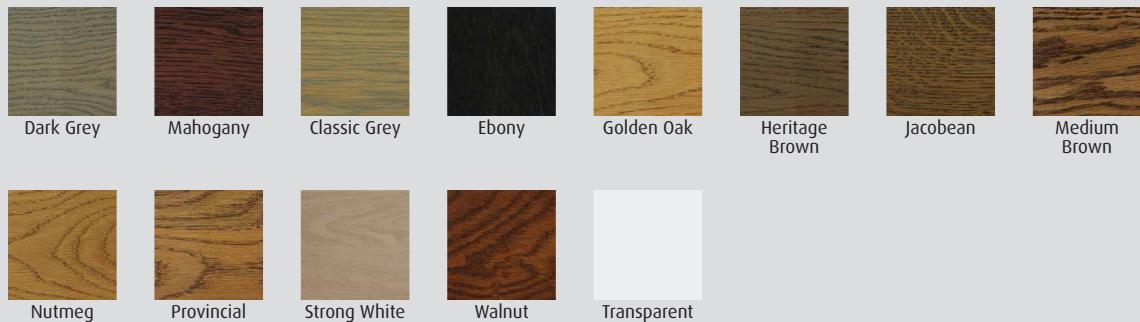

Color samples are not binding


## LOBA Stain

# Fastest drying stain on the market for hardwood flooring



1H DRY TIME

Microfibre applicator  
see page 72.

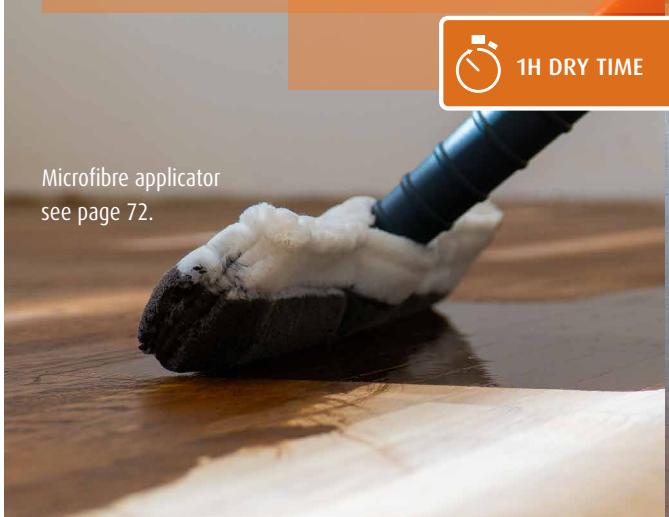

## List of Wood Species for Primers & Finish Systems

### 1. European wood species

Wood type	2K Intensive	EasyPrime		VivaPrime		PrimaSeal Plus	2K Invisible Protect*	Speed*	Life*
		Rolled	Troweled	Rolled	Troweled				
Maple	+	+	+	+	+	+	+	+	+
Acacia/Robinia	+	◊	-	◊	-	+	◊	◊	◊
Acacia/steam-treated Robinia	+	◊	-	◊	-	+	◊	+	◊
Birch	+	+	+	+	+	+	+	+	+
Pear tree	◊	-	-	-	-	-	-	-	-
Steam-treated beech	+	+	-	◊	-	+	◊	◊	◊
Beech	+	+	+	+	+	+	+	+	+
Oak	+	+	+	+	+	+	+	+	+
Alder	+	+	◊	+	◊	+	+	+	+
Ash	+	+	+	+	+	+	+	+	+
Spruce	+	+	+	+	+	+	+	+	+
Chestnut	+	+	◊	+	◊	+	+	+	+
Pine	+	+	-	+	-	+	+	+	+
Cherry	+	+	-	◊	-	+	◊	+	◊
Larch	+	◊	-	◊	-	+	◊	+	◊
Walnut	+	◊	-	◊	-	◊	◊	◊	◊
Olive	+	+	-	◊	-	+	◊	◊	◊
Smoked oak	+	◊	-	◊	-	◊	◊	-	◊
Red oak	+	+	+	+	+	+	+	+	+
Elm	+	+	◊	◊	◊	+	◊	◊	◊

### 2. Exotic wood species

Afromosia	+	+	-	◊	-	+	◊	+	◊
Arura Vermelho	+	-	-	-	-	+	-	+	-
Bamboo	-	+	-	+	-	+	+	-	+
Steam-treated bamboo	-	+	-	◊	-	+	◊	◊	◊
Bilinga	+	+	-	◊	-	+	◊	◊	◊
Basra locus	+	+	-	◊	-	+	◊	◊	◊
Cabreuva	+	+	-	◊	-	+	◊	◊	◊
Steam-treated coigue	+	+	-	◊	-	+	◊	◊	◊
Cumaru/almendrillo	+	+	-	◊	-	+	◊	◊	◊
Curupau	+	+	-	◊	-	+	◊	◊	◊
Doussie/afzelia	+	◊	-	◊	-	+	◊	+	◊
Ebony/macassar	-	+	-	◊	-	+	◊	-	◊
Eucalyptus/spotted gum	+	+	-	◊	-	+	◊	+	◊
Eucalyptus/jarrah	+	+	-	◊	-	+	◊	+	◊
Guatambu	+	+	-	◊	-	+	◊	+	◊
Hevea	+	+	-	+	-	+	+	+	+
Incienso Colorado	+	+	-	◊	-	+	◊	+	◊
Ipe/lapacho	◊	◊	-	◊	-	◊	◊	◊	◊
Iroko/kambala	-	-	-	-	-	◊	-	-	-
Iron wood	+	+	-	◊	-	+	◊	+	◊
Jatoba/Brazilian cherry	+	◊	-	◊	-	+	◊	+	◊
Kempas	-	◊	-	◊	-	+	◊	◊	◊
Coconut	+	+	-	◊	-	+	◊	+	◊
Kotibe	+	+	-	◊	-	+	◊	+	◊
Mahogany	+	+	-	◊	-	+	◊	+	◊
Massanduba	+	+	-	◊	-	+	◊	◊	◊
Mecrusse	+	◊	-	◊	-	+	◊	◊	◊
Merbau	+	◊	-	◊	-	+	◊	◊	◊
Muhuhu	+	-	-	-	-	+	-	-	-
Mutenye	+	+	-	◊	-	+	◊	+	◊
Padouk	+	+	-	◊	-	+	◊	◊	◊
Panga Panga	+	+	-	◊	-	+	◊	+	◊
Palisander	-	+	-	◊	-	+	◊	◊	◊
Pigua Marfin	+	-	-	-	-	+	-	-	-
Pitch pine (old floors)	+	+	-	+	-	+	+	+	+
Hard pine (pitch pine new)	+	+	-	◊	-	+	◊	◊	◊
Purpleheart	+	-	-	-	-	+	-	-	-
Sucupira	+	+	-	◊	-	+	◊	+	◊
Tasmanian oak	+	+	+	+	+	+	+	+	+
Tauari	+	+	-	+	-	+	+	+	+
Teak	+	+	-	◊	-	+	◊	+	◊
Tigerwood	+	+	-	◊	-	+	◊	+	◊
Wenge	+	+	-	◊	-	+	◊	+	◊
Yvyraro	+	+	-	◊	-	+	◊	+	◊
Cypress	+	+	-	◊	-	+	◊	+	◊

### 3. Other substrates

Multiplex	◊	-	+	◊	+	◊	◊	◊	◊
OSB plates	◊	-	+	◊	+	◊	◊	◊	◊
V100 chipboards	◊	-	+	◊	+	◊	◊	◊	◊

+ = Can be used without restrictions

◊ = Use may lead to problems.  
We recommend consulting LOBA

- = Use not recommended

\* Can be used in set-up without primer

## Application Tools for Primers & Finish Systems



	OIL ROLLER	FINISH ROLLER			Applicator	TROWEL
	Micro 60-80	Micro 100-120	Universal 100	Deluxe 120	Microfibre applicator	Trowel
	ART.-NO. 16236-1	ART.-NO. 16236	ART.-NO. 16233	Artikel-NO. 16234	ART.-NO. 16234	ART.-NO. 16083
EasyPrime	-	✓	✓	-	-	✓
VivaPrime	-	✓	✓	-	-	✓
PrimaSeal Plus	-	-	✓	-	-	-
Stain	-	-	-	-	✓	-
2K Contact	✓	-	-	-	-	✓
StyleBase	-	✓	✓	-	-	-
EasyFinish Neo	-	✓	-	✓	-	-
EasyFinish	-	✓	-	✓	-	-
Viva	-	✓	-	✓	-	-
Speed	-	-	-	✓	-	-
Life	-	✓	-	✓	-	-
2K InvisibleProtect	-	-	-	✓	-	-
2K Supra A.T.	-	✓	-	✓	-	-
2K Resist	-	-	-	✓	-	-
2K Duo	-	✓	-	✓	-	-
2K Drive	-	✓	-	✓	-	-
2K Fusion	-	✓	-	✓	-	-
2K UltraElastic	-	✓	-	✓	-	-
SportFinish	-	✓	-	✓	-	-
2K UltraSport	-	✓	-	✓	-	-
2K Style	-	✓	-	-	-	-

✓ = Can be used without restrictions

- = Use not recommended

\* = Observe technical information

## Use our download area

- Set-up recommendations
- Technical information
- Application videos



→ [www.loba.de/int\\_en/downloads](http://www.loba.de/int_en/downloads)

## Consumption calculator

Your handy helper for quickly calculating how much you need can be found at [www.loba.de/int\\_en/services](http://www.loba.de/int_en/services) and on every product page.



## Water-based finishes – sustainable and easy to work with

Professionally laid floors maintain their perfect appearance with the right finishing. The right finishing also ensures ideal protection against dirt, wear, chemicals and moisture across the whole surface and for a long time. Whether you want to finish a hardwood floor or make cork flooring water-resistant – LOBA offers you water-based premium systems for every area of application.





## EasyFinish Neo

1-component parquet finish with 2-component performance based on renewable resources for particularly heavy-duty use.

- 2K performance in a practical 1K system
- Long-lasting beauty of the floor – high resistance to mechanical wear and household chemicals
- LOBA Easy-Handling technology
- Based on renewable raw materials
- 25 % CO<sub>2</sub> reduction compared to the industry standard
- In combination with LOBA SportCare or LOBA Refresh, fulfills the requirements for sliding friction in accordance with DIN 18032 for sports floors

ART.-NO.	VARIANT	■	□	■■■	GISCODE
11510-000003	satin	1l/5l/10l	12/4/-	480/128/60	
11510-000001	semi-gloss	1l/5l/10l	12/4/-	480/128/60	W2+

APPLICATION DEVICE	ml/m <sup>2</sup>
Deluxe 120 roller	
Microfibre 100 - 120 roller	100 - 120
<b>Stress level</b>	
Wood   Cork	

# go easy get neo!



2K PERFORMANCE



RENEWABLE RESOURCES



CO<sub>2</sub> REDUCTION



## EasyFinish

1-component parquet finish with 2-component performance for particularly heavy-duty use.

- Easy 1K system combined with 2K performance
- Outstanding application qualities – easy to use and safe, no lap marks
- Suitable for almost all wood species as well as cork
- EasyFinish semi-gloss combined with LOBA SportCare meets the requirements for friction according to DIN 18032 for sports floors
- Long-lasting beauty of the floor – high resistance to mechanical wear and household chemicals
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

ART.-NO.	VARIANT	■	□	■■■	GISCODE
11517-000003	satin	1l/5l/10l	12/4/-	480/128/60	
11517-000001	semi-gloss	1l/5l/10l	12/4/-	480/128/60	
11517-000002	gloss	5l	4	128	W3+

APPLICATION DEVICE	ml/m <sup>2</sup>
Deluxe 120 roller	
Microfibre 100 - 120 roller	100 - 120
<b>Stress level</b>	
Wood   Cork	
1) semi-gloss	



**Unique in its class thanks to 2K performance!**





## Viva

1K parquet finish for normal to heavy use.

- Excellent chemical resistance and high abrasion resistance
- Very good resistance to black heel marks
- Powerful resistance to plasticisers from parquet adhesives
- Easy and safe application, no lap marks
- Full "Connected Systems" approval
- Low VOC content
- Very low emission, certified to EMICODE® EC1

ART.-NO.	VARIANT				GISCODE
11519-100003	satin	5l/10l	4/-	128/60	
11519-100001	semi-gloss	1l/5l/10l	12/4/-	480/128/60	W2+

APPLICATION DEVICE	ml/m <sup>2</sup>
Deluxe 120 roller	100 - 120
Microfibre 100 - 120 roller	
<b>Stress level</b>	
 Residential      Commercial      Extreme	
Wood	



## Speed

1K parquet finish for effective, time-saving 2-layer full build-up.

- High solids content
- Coat thickness corresponds to a 3-coat set-up
- Excellent sandability
- Intensifies the color of the wood
- Powerful resistance to plasticisers from parquet adhesives
- Very easy to use
- Low emission, certified to EMICODE® EC2

ART.-NO.	VARIANT				GISCODE
11568-000003	satin	5l/10l	4/-	128/60	
11568-000001	semi-gloss	5l/10l	4/-	128/60	W2+

APPLICATION DEVICE	ml/m <sup>2</sup>
Deluxe 120 roller	120 - 150
<b>Stress level</b>	
 Residential      Commercial      Extreme	
Wood	



## Life

1-component parquet finish for normal use.

- Good price/performance ratio
- Can be used in full structure
- Balanced properties
- High filling capacity
- Easy and safe application

ART.-NO.	VARIANT				GISCODE
11524-900003	satin	5l/10l	4/-	128/60	
11524-900001	semi-gloss	5l/10l	4/-	128/60	W2+
11524-900002	gloss	5l	4	128	

APPLICATION DEVICE	ml/m <sup>2</sup>
Deluxe 120 roller	100 - 120
Microfibre 100 - 120 roller	
<b>Stress level</b>	
 Residential      Commercial      Extreme	
Wood	



## 2K InvisibleProtect

New-generation surface protection for parquet and wooden floors.

- Natural structure and feel like untreated wooden flooring
- 2-coat system without primer
- Easy to work with
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- No polishing effect
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original color of the wood remains as it was in its original state
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

ART.-NO.	□	□	□□□	GISCODE
11474-000005	1kg/5kg	6/2	360/96	W2/DD+

APPLICATION DEVICE	g/m <sup>2</sup>
Deluxe 120 roller	110 - 130
<b>Stress level</b>	
1 Residential	Commercial
2	3
3	4
4	5
5	6
6	7
7	8
8	9
9	10
Extreme	
Wood   Cork	



## 2K Supra A.T.

Ceramic-reinforced 2-component polyurethane parquet finish for floors with particularly high resistance for the highest demands.

- Fully usable after 12 hours
- Sets new standards in quality
- Meets highest demands
- Extremely high scratch resistance thanks to ceramic components
- Qualified for various floorings
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

ART.-NO.	VARIANT	□	□	□□□	GISCODE
11465-000003	satin	5 kg	2	96	W3/DD+
11465-000001	semi-gloss	5 kg	2	96	

APPLICATION DEVICE	g/m <sup>2</sup>
Deluxe 120 roller	100 - 120
<b>Stress level</b>	
1 Residential	Commercial
2	3
3	4
4	5
5	6
6	7
7	8
8	9
9	10
Extreme	
Wood   Cork	
1) satin	



## 2K Resist

Water-based 2-component polyurethane finish.

- Increased resistance to household chemicals, disinfectants, hair dyes, urine and plasticisers.
- Versatile – can be used on various surfaces
- Easy-to-clean, film-forming surface
- Very low emission, certified to EMICODE® EC1
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Tested resistance to chemical stress in accordance with DIN 68861-1 classification 1B

ART.-NO.	VARIANT	5 kg	2	96	GISCODE
11411-000001	semi-gloss				W3/DD+

APPLICATION DEVICE	g/m <sup>2</sup>
Deluxe 120 roller	80 - 100
Wood   Linoleum   PVC   Trowelled floors	
Stress level	
1 Residential	2 Commercial
3	4
5	6
7	8
9	10 Extreme

**2K Resist**

Reliable protection for all types of floors – specially developed for chemically stressed and hygiene-critical environments.

**EXTREME CHEMICAL RESISTANCE**

**Chemicals don't stand a chance!**



## 2K DUO

2-component polyurethane parquet finish for extremely heavy-duty use.

- Easy and safe application
- Very low emission, certified to EMICODE® EC1 Plus
- Qualified for various floorings
- Excellent wear resistance
- Excellent chemical resistance
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

ART.-NO.	VARIANT	■	□	■■■	GISCODE
11466-900004	extra-matte	5 kg	2	96	W3/DD+
11466-900003	satin	1kg/5kg	6/2	360/96	W2/DD+
11466-900001	semi-gloss	1kg/5kg	6/2	360/96	W2/DD+
11466-900002	gloss	5 kg	2	96	W3/DD+

APPLICATION DEVICE	g/m <sup>2</sup>
Deluxe 120 roller	
Microfibre 100 - 120 roller	100 - 120
<b>Stress level</b>	
<b>Wood   Cork</b>	
1) satin, semi-gloss	



## 2K Fusion

2-component polyurethane parquet finish for particularly heavy-duty use.

- Easy and safe application
- Excellent wear resistance
- Good price/performance ratio
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

APPLICATION DEVICE	g/m <sup>2</sup>
Deluxe 120 roller	
Microfibre 100 - 120 roller	100 - 120
<b>Stress level</b>	
<b>Wood   Cork</b>	

ART.-NO.	VARIANT	■	□	■■■	GISCODE
11471-000003	satin	5 kg	2	96	W3/DD+
11471-000001	semi-gloss	5 kg	2	96	W3/DD+



## 2K Drive

2-component parquet finish for heavy-duty use.

- Highly resistant to plasticizers from parquet adhesives
- Easy and safe application
- Excellent resistance
- Can be used in two-coat full build-up
- Excellent price-performance ratio

APPLICATION DEVICE	g/m <sup>2</sup>
Deluxe 120 roller	
Microfibre 100 - 120 roller	100 - 120
<b>Stress level</b>	
<b>Wood</b>	

ART.-NO.	VARIANT	■	□	■■■	GISCODE
11410-000004	extra-matte	5 kg	2	96	W3/DD+
11410-000003	satin	5 kg	2	96	W3/DD+



## 2K Contact

2-component adhesive primer for refinishing UV cured oxide containing factory finished hardwood and cork floors without intermediate sanding.

- Recommended by leading industrial wood floor manufacturers
- Extremely economical to use
- Enables dust-free renovation
- Original appearance remains preserved during restoration
- Time and cost saving

ART.-NO.				GISCODE
11520-000000	750 g	4	384	W3/DD+

APPLICATION DEVICE	
Trowel	10
Microfibre 60 - 80 oil roller	30

Wood



## TopGel

Polyurethane trowel finish to achieve a fuller surface.

- Prepares the surface for the last coat
- Visually fuller surface
- Extremely economical to use

ART.-NO.				GISCODE
11455-000000	4 kg	4	84	W3+

APPLICATION DEVICE	
Trowel	20

Wood

  
Loba GmbH & Co. KG  
Düsseldorf, Germany  
Established 1863  
with 100% family ownership

## Renovation with 2K Contact

Standard recommendation for a renovation without sanding

5 After tack-free drying (approx. 2 hours), finish with 2K Supra A.T. or 2K Duo (not gloss)

4 Carefully apply one coat of 2K Contact using the LOBA trowel or the LOBA oil roller Micro 60-80

3 If necessary, set up a test area and carry out an adhesion test

2 Allow sufficient drying time; overnight drying for absorbent surfaces

1 Prepare the substrate, remove non-load-bearing coats, use an intensive cleaner if necessary

 Please note the detailed technical information, processing instructions and recommended finishes.

With cleaning and care products, you can maintain the beauty of your floors in the long term.



## Whitener

Additive for brightening wood surfaces.

- Creates a smooth brightening of the wood surface
- Intensifies the whitening effect of white colored surfaces
- Variable control of brightening intensity
- May be combined with all water-based primers and finishes from LOBA
- Reduces the natural yellowing of the wood
- Provides individual design options
- Water-based technology, solvent-free
- Simple and safe application



ART.-NO.			GISCODE
11540-900126	80 ml	15	W1



## Amberizer

Additive to intensify the colour of wood surfaces.

- May be combined with all water-based primers and finishes from LOBA
- Adjustment of newly finished surfaces to solvent-containing finished existing surfaces
- Water-based technology, solvent-free
- Simple and safe application

ART.-NO.			GISCODE
11540-800217	100 ml	15	W1



## SlipResist

Additive to improve slip resistant properties.

- Certified slip resistance
- Additive has no negative effects on the soiling behavior
- Water-based technology, solvent-free
- Simple and safe application
- Simplified storage



ART.-NO.



11018-000000


100 g



15

## SlipResist for application in the final coat.

The following finishes achieve a certified anti-slip rating of R10 or R11 according to DIN EN 16165:2023-02 when SlipResist is added.

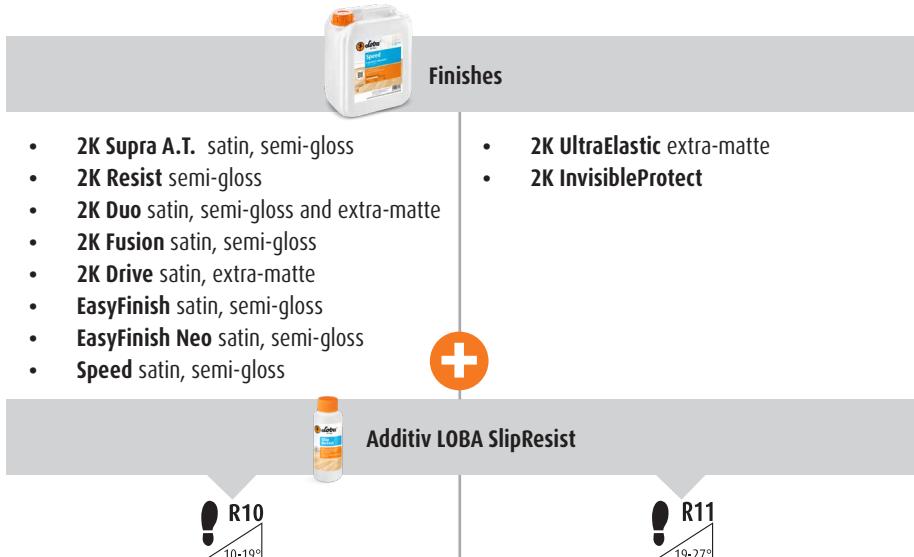

## UV-Protect

Helps minimize the darkening of light coloured wood from the influence of sunlight.

- Original appearance of the wood is preserved long-term
- Can be used for all water-based LOBA finishes
- Innovation by LOBA

ART.-NO.



11017-000000

100 ml



15



## Argo

Additive to prolong drying time.

- Reduces the risk of lap marks
- Finish film properties are unchanged

ART.-NO.



11015-000000

250 ml



12



## Oils and waxes for naturally beautiful floors

Nothing brings out the naturalness and texture of hardwood flooring as beautifully as oil and wax. LOBA's first-class oil and wax systems perform this task sustainably. Based on natural raw materials, they impress with outstanding properties such as high wear resistance, a water- and dirt-repellent formula and excellent resistance to chemicals.



## 2K ImpactOil

Solvent-free, 2-component high-solid penetrating oil based on natural ingredients for wooden floors.

- Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas
- Time-saving processing in a 1-day system
- Extremely economical to use
- 100% solid – solvent-free
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Easy and safe application
- One roller application is sufficient
- Can be used after only 24 hours
- Suitable for children's toys as per EN 71-3
- Oxime and cobalt free

ART.-NO.	VARIANT	□	□	□	GISCODE
10610-000000	Transparent	750 g/2.5 kg	4	400/120	Ö10/DD+

APPLICATION DEVICE	g/m <sup>2</sup>
Microfibre 60 - 80 oil roller	30 - 60
Wood   Trowelled floors	
    	
  	





## PreTone

Water-based pigment stain for wooden floors.

- For significantly bolder colors
- Reduced oil-specific yellowing
- Easy and safe application
- Solvent-free
- Virtually limitless color combinations are possible
- Odor neutral

ART.-NO.	VARIANT				GISCODE
10612...	Various colors	2.5l	6	144	W2+

All colors are also available in sample cans.



Color samples are not binding

APPLICATION DEVICE	
Microfibre 100 - 120 roller as a wiper	100 - 120
Spray can and applicator	

Wood





## 2K ImpactOil Color

Colored, solvent-free 2-component high-solid penetrating oil based on natural ingredients for wooden floors.

- Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas
- Time-saving processing in a 1-day system
- Extremely economical to use
- 100% solid – solvent-free
- All variants can be mixed with each other
- Easy and safe application
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3
- Oxime and cobalt free

ART.-NO.	VARIANT				GISCODE
10610-...	Various colors	750 g	4	400	Ö10/DD+
10613-...	Various colors	750 g	4	400	Ö10+

APPLICATION DEVICE		g/m <sup>2</sup>
Trowel		30 - 60
Wood		
		LOBA GmbH & Co. KG Emisionenfreies Bauprodukt aus nachwachsenden Rohstoffen S100-10
		LOBA Microfaser Emissionsfreies Bauprodukt aus nachwachsenden Rohstoffen S100-10
		CONNECTED SYSTEMS
		10-19°
		EMISSIONS DANS L'AIR INTERIEUR A+ A B C
		≥18°

All colors are also available in sample cans.

10610-90 / SampleSet / 17 x 100 ml + 5 x 100 ml PreTone



Color samples are not binding

## Coloration with 2K ImpactOil Color

Standard recommendation for the coloring impregnation of hardwood floors.

6 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige

5 Apply a second layer of **2K ImpactOil Color** with trowel, allow to penetrate

4 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige

3 First application of **2K ImpactOil Color** with trowel, allow to penetrate

2 Optional: pretreatment with PreTone using LOBA Wischwiesel or LOBA Microfaser 100-120 finish roller as wiper

1 Preparation up to fine sanding

Please note the detailed technical information, processing instructions and set-up recommendations as well as technical tips and tricks „Sanding Instruction Staining of Wooden Floors“

Discover the infinite color variety of 2K ImpactOil Color, also in combination with PreTone.

With LOBA care and maintenance products, the beauty of your floors will persist.



## Akzent 100 Oil

Solvent-free high-solid oil on natural base for wooden floors.

- Made of plant-based oils
- 100% solid – solvent-free
- Extremely economical to use
- High resistance to water
- Easy and safe application
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3
- Oxime and cobalt free

ART.-NO.	■	■	■	GISCODE
10601-000000	750 ml/2.5 l	6/4	480/120	Ø10+

APPLICATION DEVICE	ml/m <sup>2</sup>
Microfibre 60 - 80 oil roller	
Trowel (2 in a cross-wise pattern)	30 - 60
Wood	
   <b>R10</b> 10-19°	
 <b>A+</b> A B C	



## HardwaxOil Nature

Layer-forming hard wax oil for a smooth and full bodied raw wood appearance for wooden floors.

- Oxime and cobalt free
- Natural look of an untreated floor
- Smooth and full bodied appearance
- Natural, velvety feel
- Suitable for partial repairs
- Dirt resistant, easy to clean surface
- Anti-slip class R10 according to DIN EN 16165:2021-12
- Suitable for children's toys as per EN 71-3

ART.-NO.	□	□	□	GISCODE
10509-000009	750 ml/2.5 l	6/4	480/120	Ö60+

APPLICATION DEVICE	ml/m <sup>2</sup>
Microfibre 60 - 80 oil roller	40 - 60
Oilbrush	
Trowel	20
Wood   Cork	
   <b>R10</b> <small>10-19°</small>	





## HardwaxOil

Layer-forming hard wax oil for a smooth and full bodied appearance for wooden floors.

- Oxime and cobalt free
- Smooth and full bodied appearance
- Natural, velvety feel
- Suitable for partial repairs
- Dirt resistant, easy to clean surface
- Anti-slip class R10 according to DIN EN 16165:2021-12
- Suitable for children's toys as per EN 71-3

### APPLICATION DEVICE

	ml/m <sup>2</sup>
Microfibre 60 - 80 oil roller	40 - 60
Oilbrush	
Trowel	20

### Wood | Cork



ART.-NO.	VARIANT	■	□	■■■	GISCODE
10509-000004	extra-matte	750 ml/2.5l/10l	6/4/-	480/120/42	
10509-000003	satin	750 ml/2.5l/10l	6/4/-	480/120/42	Ö60+
10509-000001	semi-gloss	750 ml/2.5l/10l	6/4/-	480/120/42	



## HardwaxOil EcoPlus


Hard wax oil on natural base for wooden floors.

- Smooth and full bodied appearance
- One roller application is sufficient
- Oxime and cobalt free
- Extremely economical to use
- Easy and safe application
- Water and dirt resistant
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3


### APPLICATION DEVICE

	ml/m <sup>2</sup>
Trowel	
Microfibre 60 - 80 oil roller	30 - 60

### Wood

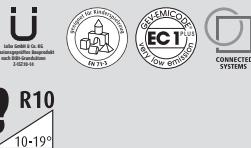

ART.-NO.	VARIANT	■	□	■■■	GISCODE
10501-000000	semi-gloss	2.5l	4	120	Ö20+

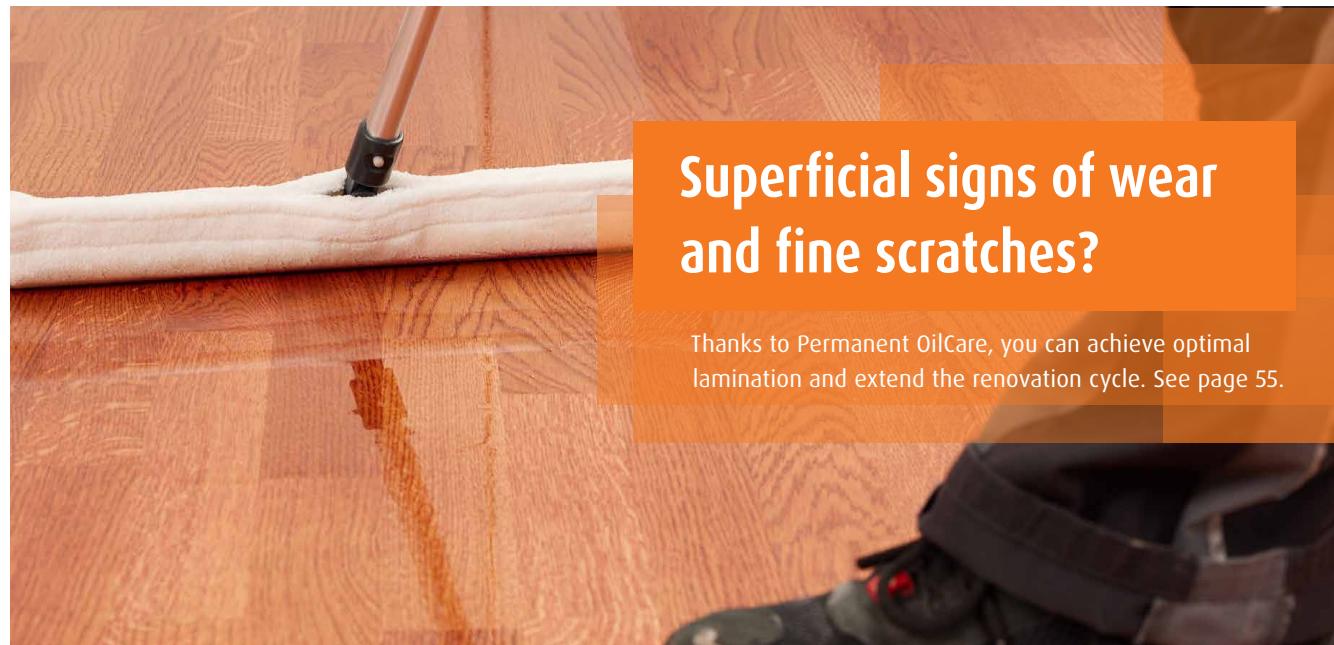

# Versatile color design for hardwax oil



Customize your own feel-good color shades – with 17 nuances of 2K ImpactOil Color that can be mixed with each other and color intensification using PreTone

## Color design | optional pretreatment and 1st coat

- See our sanding recommendations for coloration.
- Optional pretreatment with PreTone to intensify the colors.
- Apply 2K ImpactOil Color using a trowel and wait for it to penetrate.
- Approximately 20 minutes after beginning the application, smooth out using a single-disc machine and beige SpecialPad.
- Consumption per coat: approx. 30 g/m<sup>2</sup>.
- Can be walked on after 12 hours, HardwaxOil can be applied after 24 hours.

## Finishing | 2nd coat

- Apply HardwaxOil or HardwaxOil Nature (only on lighter colors).
- For highly absorbent surfaces, an additional coat may be required after intermediate sanding with LOBASAND GridPad fitted with a LOBASAND Hook & Loop strip to achieve full homogeneous coverage.

## List of Wood Species for Oil & Wax Systems

### 1. European wood species

Wood type	2K ImpactOil	Akzent 100 Oil	HardwaxOil	HardwaxOil Nature	HardwaxOil EcoPlus
Maple	+	+	+	+	+
Acacia / Robinia	+	+	+	+	+
Acacia / steam-treated Robinia	+	+	+	◊	+
Birch	+	+	+	+	+
Pear tree	◊	◊	-	-	◊
Steam-treated beech	+	+	+	◊	+
Beech	+	+	+	+	+
Oak	+	+	+	+	+
Alder	+	+	+	+	+
Ash	+	+	+	+	+
Spruce	+	+	+	+	+
Chestnut	+	+	+	+	+
Pine	+	+	+	+	+
Cherry	+	+	+	◊	+
Larch	+	+	+	+	+
Walnut	+	+	+	◊	+
Olive	+	+	◊	◊	+
Smoked oak	+	+	+	◊	+
Elm	+	+	+	◊	+

### 2. Exotic wood species

Afromosia	+	+	+	◊	+
Arura Vermelho	+	+	+	◊	+
Bilinga	+	+	+	+	+
Cabreuva	+	+	+	◊	+
Cumaru / almendrillo	+	+	+	+	+
Doussie / afzelia	+	+	+	◊	+
Eucalyptus / spotted gum	+	+	+	+	+
Eucalyptus / jarrah	+	+	-	-	+
Guatambu	+	+	◊	◊	+
Hevea	+	+	+	+	+
Ipe / lapacho	◊	◊	-	-	◊
Iroko / kambala	+	+	+	◊	+
Iron wood	+	+	◊	◊	+
Jatoba / Brazilian cherry	+	+	+	◊	+
Coconut	+	+	-	-	+
Kotibe	+	+	+	◊	+
Mahogany	+	+	+	◊	+
Massaranduba	+	+	◊	◊	+
Mecrusse	+	+	+	◊	+
Merbau	+	+	+	◊	+
Muhuhu	+	+	+	◊	+
Padouk	+	+	-	-	+
Panga Panga	+	+	+	◊	+
Piguiá Marfin	+	+	◊	◊	+
Pitch pine (old floors)	+	+	+		+
Hard pine (pitch pine new)	+	+	◊	◊	+
Purpleheart	+	+	◊	◊	+
Sucupira	+	+	+	◊	+
Tasmanian oak	+	+	+	+	+
Teak	+	+	+	◊	+
Wenge	+	+	+	◊	+
Cypress	◊	◊	◊	◊	◊

### 3. Other substrates

Multiplex	+	+	◊	◊	+
OSB plates	◊	◊	◊	◊	◊
V100 chipboards	◊	◊	◊	◊	◊

+= Can be used without restrictions

◊= Use may lead to problems.  
We recommend consulting LOBA.

-= Use not recommended

\* Can be used in full structure



## Cleaning and care systems for oiled/waxed flooring

Page 55

### Application Tools for Oil & Wax Systems



	OIL ROLLER	FINISH ROLLER			TROWEL
	Micro 60-80	Micro 100-120	Universal 100	Deluxe 120	Trowel
	ART.-NO. 16236-1	ART.-NO. 16236	ART.-NO. 16233	ART.-NO. 16234	ART.-NO. 16083
PreTone	—	✓	—	—	—
2K ImpactOil Color	—	—	—	—	✓
2K ImpactOil transparent	✓	—	—	—	—
Akzent 100 Oil	✓	—	—	—	✓
HardwaxOil EcoPlus	✓	—	—	—	—
HardwaxOil	✓	—	—	—	✓
HardwaxOil Nature	✓	—	—	—	✓

✓ = Can be used without restrictions

— = Use not recommended

\* = Observe technical information

### Use our download area

- Set-up recommendations
- Technical information
- Application videos



→ [www.loba.de/int\\_en/downloads](http://www.loba.de/int_en/downloads)

### Consumption calculator

Your handy helper for quickly calculating how much you need can be found at [www.loba.de/int\\_en/services](http://www.loba.de/int_en/services) and on every product page.



## A great sport

Water-based finishes from LOBA for sports flooring are extremely resilient and can withstand even the toughest challenges in top-class sports. Our finishes are suitable for use in gyms and multi-purpose halls and are certified by FIBA, the international basketball federation, as material for basketball competitions, even at the international elite level.





## SportFinish\*

1-component parquet finish for sports parquet and sports wood floors.

- Meets the coefficient of sliding friction of the European sports floor standard
- Good price/performance ratio
- Easy and safe application

ART.-NO.	VARIANT	■	■■■	GISCODE
11537-000001	semi-gloss	10 l	60	W2+

\* made-to-order



## 2K UltraSport

2-component polyurethane parquet finish for sports floors for particularly heavy-duty use.

- Meets the requirements of German and European sports flooring standards
- Extremely high scuff-mark resistance
- Easy and safe application
- Excellent wear resistance
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

ART.-NO.	VARIANT	■	■	■■■	GISCODE
11401-900005	extra-matte	5 kg	2	96	
11401-900003	satin	5 kg	2	96	W3/DD+

APPLICATION DEVICE	ml/m <sup>2</sup>
Deluxe 120 roller	100 - 120
Microfibre 100 - 120 roller	
Wood	



The appropriate primers and finishes  
suitable for sports flooring.



\* Semi-gloss, in combination with SportCare.



## SportRemover

Deep cleaner for sports floors, pH-neutral.

- Removes old layers of care product
- Removes stubborn dirt
- pH-neutral, also suitable for linoleum floor coverings

Wood | Linoleum | PVC

ART.-NO.			GISCODE
10078-000000	10l	60	GG60



## SportCleaner

Maintenance cleaning concentrate for sports floors, pH-neutral.

- Great cleaning power
- A concentrate with a very high yield, 1l of LOBA SportCleaner makes up to 200 l of ready-to-use cleaning solution
- Material-protecting and pH-neutral
- Environmentally friendly biodegradable cleaner
- Ideal for use with cleaning machines

Water-resistant floors

ART.-NO.			GISCODE
10178-000000	10l	60	GU73



## Sportbodenpflege

Wipe care product for cleaning and care of sports floors.

- For regular wipe care in sports halls
- Can also be machine applied
- Meets the requirements of German and European sports flooring standards
- Extremely economical concentrate

Linoleum | PVC

EN 14904

ART.-NO.			GISCODE
10059-200000	10l	60	GU83



## SportCare

Care product for sports floors.

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Brings new shine to heavily used and worn floors
- Prevents scuff marks from shoe soles in the finish
- Especially safe to walk on
- Easy and safe application
- Extremely high scuff-mark resistance

Wood | Linoleum | PVC



DIN 18032

EN 14904

ART.-NO.				GISCODE
10055-000000	1l/10l	12/-	480/60	GE20

## SportCare with LOBA Wischwiesel

Water-based dispersion care product for finished floors. Protects finished floors against fine scratches and signs of wear with a care film. Prevents early wear and increases the surface's lifespan.


Application with the LOBA Wischwiesel is recommended.

**See page 72.**



# Long-term protection for resilient coverings

Whether you need to finish newly laid designer or vinyl flooring or want to renovate flooring that's looking a little worn: With our water-based system for resilient floor coverings made of vinyl, PVC, LVT or linoleum, you can ensure reliable protection of the surface against dirt, liquids and wear, even in heavy-traffic areas.

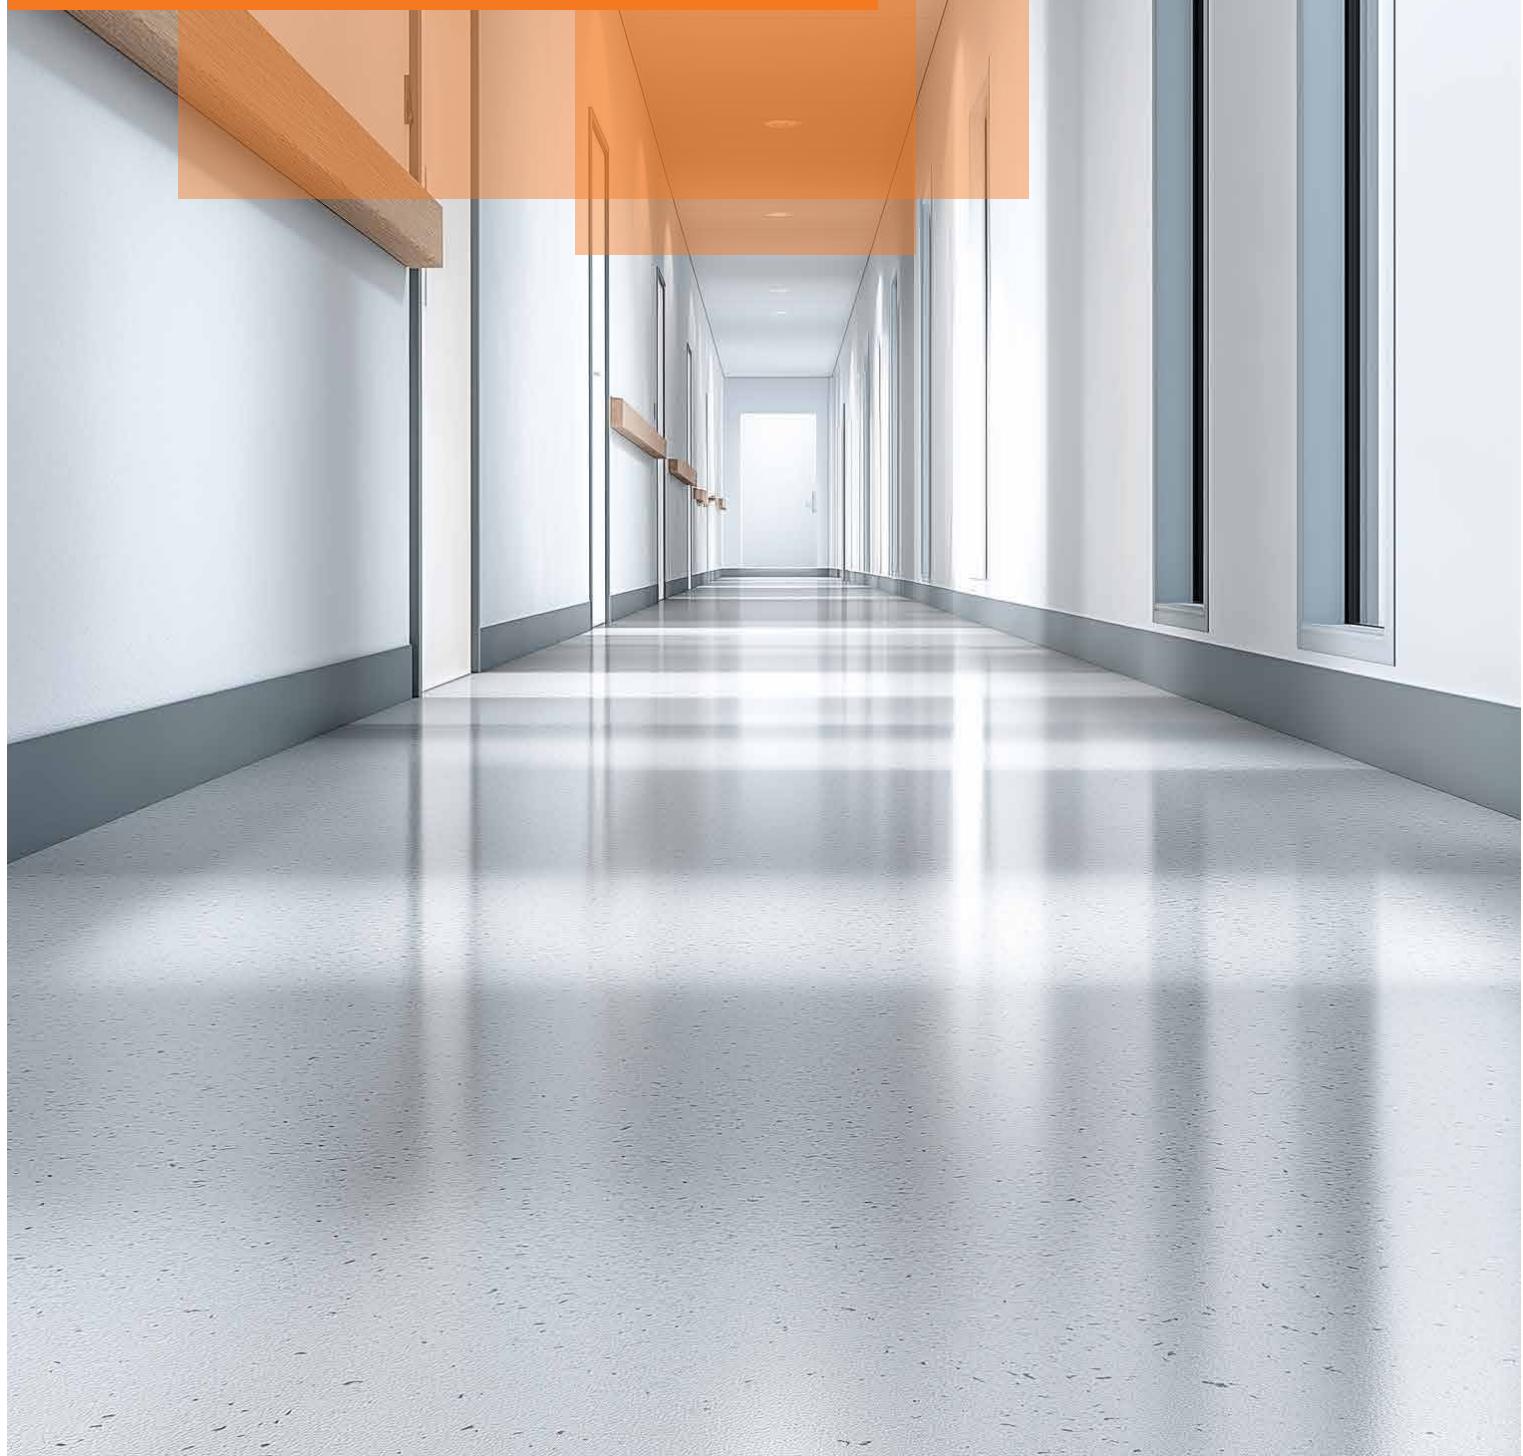



## 2K UltraElastic

2-component polyurethane finish for resilient floorings.

- Lap-free application
- Specially developed for renovating linoleum, PVC, CV and LVT coverings
- Reduces the cleaning effort due to reduced dirt adhesion
- Optimised joint protection safeguards the substrate
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

ART.-NO.	VARIANT				GISCODE
11043-000005	extra-matte	5kg	2	96	W3/DD+

### APPLICATION DEVICE

Microfibre 100 - 120 roller

60 - 80


### Stress level



Linoleum | PVC



## TIP ON TOP

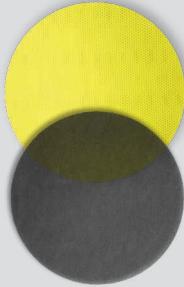

### Intermediate sanding for 2K UltraElastic

Can be re-finished within 24 hours without intermediate sanding, and thereafter only with intermediate sanding. Intermediate sanding before the last application improves the final visual result. Simply use LOBASAND PerforatedPad P180 or a finer grain size; alternatively you can use LOBASAND SandingGrid P180 or a finer grain size.

**LOBA 2K Duo** and **2K Supra A.T.** are also ideal for elastic floors – see more one page 22 and 24.



## 2K Resist



EXTREME CHEMICAL RESISTANCE

Reliable protection for all types of floors – specially developed for chemically stressed and hygiene-critical environments.


**NEW**



# Chemicals don't stand a chance!

## Industrial look made easy

Cool, individual, timeless: A minimalist industrial look can easily be created with a floor in a concrete look – with the Factory Line from LOBA. The water-based, very low-emissions system retains the natural color and visual effects of cementitious trowelled flooring and thus opens up a wide range of options for designing concrete-look floors.

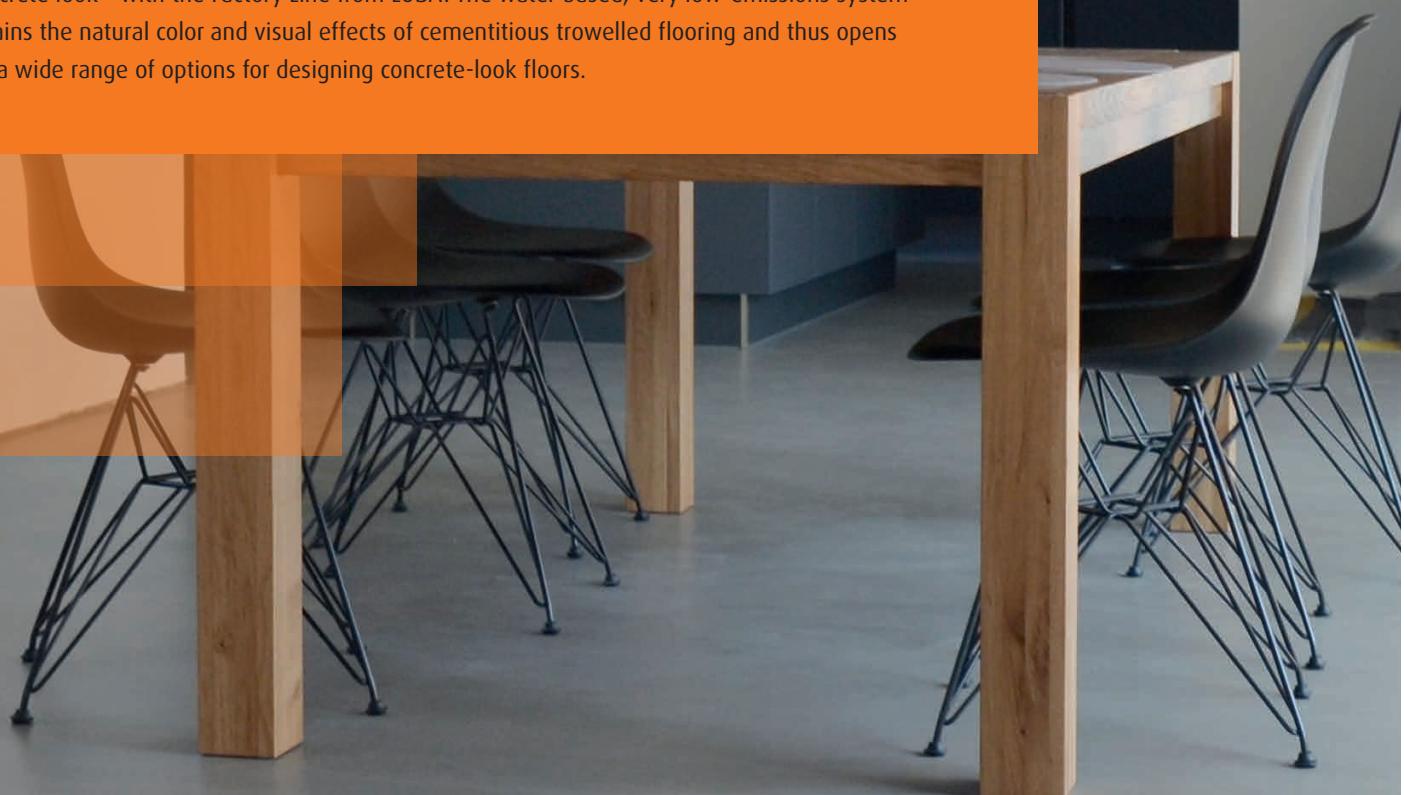



## StyleBase

Water-based barrier primer for LOBA StyleFloor and cementitious floor leveling compounds.

- Easy and safe application
- Time-efficient thanks to application in a 2-coat system with LOBA 2K Style (1x primer, 1x finish)
- Can be used in a system with LOBA 2K Style, EasyFinish Neo and 2K Resist
- Very low emission, certified to EMICODE® EC1

ART.-NO.	VARIANT	SIZE	DISP.	GISCODE
11752-000000	5l	4	128	W2+

### APPLICATION DEVICE

Microfibre 100 - 120 roller

Universal 100 roller

ml/m<sup>2</sup>

100 - 120

### Trowelled floors



## 2K Style

2K water-based polyurethane finish for LOBA StyleFloor and cementitious floor leveling compounds.

- Uniform matt surface
- Wide range of applications also in public areas due to anti-slip R10
- Time efficient through application in a 2-coat system with StyleBase (1x primer, 1x finish)
- Easy and safe application
- Particularly low emission according to EMICODE EC1 Plus

ART.-NO.	VARIANT	SIZE	DISP.	GISCODE
11745-000004	extra-matte	5kg	2	96

### APPLICATION DEVICE

Microfibre 100 - 120 roller

g/m<sup>2</sup>

100

### Stress level



### Trowelled floors




## Product and name changes at a glance

### The following articles have been renamed

New name	Former name
StyleBase	FactoryBase
2K Style	2K FactoryStyle

## Design and protection for wooden terraces

From thorough cleaning, finishing and oiling to maintenance – the complete system from LOBA offers perfectly coordinated products for the design, protection and care of your wooden or WPC terrace. The Deck Line is ideal for various wood species, and for both smooth and grooved planks. The treatment effectively protects against UV radiation, frost and temporary surface moisture.

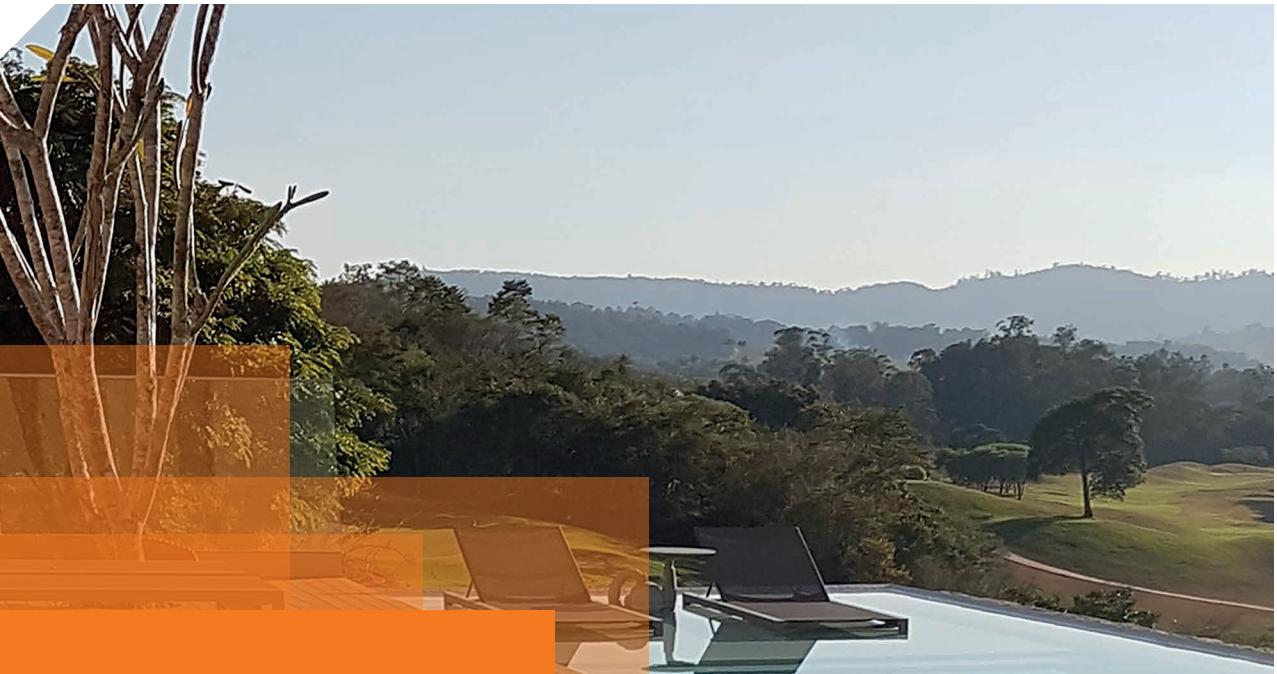



## DeckPrepare

Primer for wooden decks in outdoor areas.

- Delays the weather-related graying of wood
- Strengthens the protective effect of the subsequent surface refinement
- Improves the adhesion of the subsequent coating to the substrate
- Easy and safe application
- Quick-drying
- Color- and odorless
- Environmentally friendly
- Applicable in a system with LOBA DeckFinish/Color. Optional application before impregnation with LOBA DeckOil/Color

ART.-NO.				GISCODE
11841-000000	5l	4	128	W2+



## DeckFinish

Water-based finish for exterior wooden surfaces.

- Protects against temporary surface moisture
- Emphasizes the natural wood color
- Chlorine resistant
- Easy and safe application
- No roughening of the wood
- Short drying time
- More durable than oiled surfaces
- Suitable for smooth and grooved planks
- Mixable and tintable with all color variants

ART.-NO.	VARIANT				GISCODE
11842-000000	Transparent	5l	4	128	W3+



## DeckFinish Color

Water-based finish for exterior wooden surfaces.

- Protects against temporary surface moisture
- Chlorine resistant
- Easy and safe application
- No roughening of the wood
- Short drying time
- Suitable for all types of wood
- Suitable for smooth and grooved planks
- Applicable in a system with LOBA DeckPrepare

ART.-NO.	VARIANT				GISCODE
11842-...	Various colors	5l	4	128	W3+



Light brown

Dark brown

Red brown

Grey

Color samples are not binding

APPLICATION DEVICE	ml/m <sup>2</sup>
Oilbrush	100 - 120
Brush	Wood

APPLICATION DEVICE	ml/m <sup>2</sup>
Oilbrush	100 - 120
Brush	Wood
R10 10-19°	A ≥12°

APPLICATION DEVICE	ml/m <sup>2</sup>
Oilbrush	100 - 120
Brush	Wood
R10 10-19°	A ≥12°



## DeckOil

Oil impregnation for wooden surfaces in outdoor areas.

- Protects against temporary surface moisture
- Good penetration behaviour
- Easy and safe application
- Also suitable for impregnation of garden furniture
- Applicable on smooth and grooved planks
- The preceding use of LOBA DeckPrepare increases the durability
- Suitable for children's toys as per EN 71-3

APPLICATION DEVICE	ml/m <sup>2</sup>
Oilbrush	80 - 120
Brush	
Wood	

ART.-NO.	VARIANT	■	■	■	GISCODE
10616-000000	Transparent	750 ml/2.5 l/12 l	6/4/-	480/120/42	Ö60+



## DeckOil Color

Colored oil impregnation for wooden surfaces in outdoor areas.

- Protects against temporary surface moisture
- Good penetration behaviour
- Easy and safe application
- Also suitable for impregnation of garden furniture
- Applicable on smooth and grooved planks
- The preceding use of LOBA DeckPrepare increases the durability
- Suitable for children's toys as per EN 71-3

APPLICATION DEVICE	ml/m <sup>2</sup>
Oilbrush	80 - 120
Brush	
Wood	

ART.-NO.	VARIANT	■	■	■	GISCODE
10616-...	Various colors	2.5 l	4	120	Ö60+



Color samples are not binding



## DeckDegrayer

Degreaser for cleaning and refreshing wooden surfaces in outdoor areas.

- Ideal degreasing preparation for follow-up treatment
- Easy and safe application
- Can be used on horizontal and vertical surfaces and garden furniture, does not drip
- No sanding necessary
- Applicable to all wood species

ART.-NO.				GISCODE
10741-000000	2.5l	6	144	GG10



## DeckCleaner

Maintenance cleaner for outdoor areas.

- Can be used for maintenance and intensive cleaning
- Very productive
- Suitable for oiled and finished wood and WPC

ART.-NO.				GISCODE
10731-000000	2.5l	6	144	GU70



## DeckRefresh

Wipe care for cleaning and maintaining wooden surfaces in outdoor areas.

- Thorough, gentle wipe care
- Gives the surface a silky sheen
- Easy and safe application
- No remover necessary due to a self-emulsifying formula
- Suitable for oiled and finished wood surfaces in outdoor areas

ART.-NO.				GISCODE
10711-000000	2.5l	6	144	GU40



## WPC Refresh

Maintenance oil for outdoor areas.

- Optical upgrading for WPC and oiled wood surfaces
- Brings back the silky matte look
- Easy and safe application
- Suitable for WPC and oiled wood surfaces

ART.-NO.				GISCODE
10721-000000	1l	6	480	Ö60+

## Gently protect beautiful floors

LOBA thinks beyond the finishing of valuable flooring: In order to optimally protect the surface and maintain it for as long as possible, we offer top-quality care and cleaning products for professional users. With our wide range of products, you can maintain long-term value and a perfect appearance, both indoors and outdoors. Caring and cleaning with LOBA: For those who think long-term!



## Cleaner

Highly-concentrated cleaner for all water-resistant surfaces, pH-neutral.

- Excellent cleaning effect thanks to superb dirt-dissolving power
- Extremely economical concentrated, 1 litre of LOBA Cleaner yields up to 200 litres of ready-to-use cleaning solution
- Material-protecting and pH-neutral
- Can be used universally for all waterproof surfaces
- Environmentally friendly biodegradable cleaner

Water-resistant surfaces

ART.-NO.				GISCODE
10175-400000	1l/10l	12/-	480/60	GU73



## LaminateCleaner

Highly concentrated cleaner for laminate flooring, pH-neutral.

Laminate

- Significantly reduces the risk of swollen edges with laminate flooring
- Extremely economical concentrate
- Also suitable for plastic-coated furniture, walls, doors and windows
- Streak-free drying
- Material-protecting and pH-neutral
- Excellent cleaning effect thanks to superb dirt-dissolving power

ART.-NO.				GISCODE
10443-000000	1l	12	480	GU50



## Cleaning and care systems for sports flooring

See the Sports Flooring range on page 40.



## InvisibleCare

Water-based extra-matte dispersion care product.

Wood | Cork | Linoleum | PVC

- Preserves extra-matte appearance
- Suitable for adjusting the gloss level from semi-gloss to extra-matte
- Protective coating against light scratches and signs of wear
- Easy and safe application
- Conceals signs of wear and tear and enhances the appearance of floors
- Simplified cleaning due to reduced dirt adhesion

ART.-NO.	■	■	■	GISCODE
10492-000000	1l	12	480	GE10





## CareRemover

Deep cleaner for finished surfaces, pH-neutral.

Wood | Cork | Linoleum | PVC | Tile

- Removes old layers of care product
- Removes stubborn dirt
- Can be used universally on various floors and finished hardwood
- Material-protecting and pH-neutral

ART.-NO.				GISCODE
10065-900000	1l/10l	12/-	480/60	GG60



## ParkettCare

Care product for finished parquet floors.

Wood

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Can be used without restriction for prefinished wood floors
- Recommended by leading industrial wood floor manufacturers
- Brings new shine to heavily used and worn floors
- Easy and safe application

ART.-NO.	VARIANT				GISCODE
10011-400003	satin	1l/5l	12/4	480/128	GE10
10011-400000	silk gloss	1l/5l/10l	12/4/-	480/128/60	



## FloorCare

Care products for finished floor coverings.

Wood | Cork | Linoleum | PVC

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Can be used universally on various floors and finished hardwood
- Brings new shine to heavily used and worn floors
- Easy and safe application

ART.-NO.	VARIANT				GISCODE
10490-400003	satin	1l/5l	12/4	480/128	GE10
10490-400000	silk gloss	1l/10l	12/-	480/60	GE20
10490-400180	anti-slip	10l	-	60	GE10



## KorkCare

Care product for finished cork flooring.

Cork

- Universal care product for all finished cork flooring
- Brings new shine to heavily used and worn floors
- Easy and safe application
- Water-based and eco-friendly
- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Recommended by leading manufacturers of prefabricated cork

ART.-NO.				GISCODE
10265-400000	1l	12	480	GE10



## PermanentCare

Polyurethane permanent care product for finished surfaces.

- Particularly wear-resistant, pure PU permanent care product
- Provides long-term protection against wear
- Applies a matt shine to tired and worn floors
- Can be used universally on various floors and finished hardwood
- Extremely high scuff-mark resistance
- High solids content

Wood | Cork | Linoleum | PVC

ART.-NO.	VARIANT				GISCODE
10189-200003	satin	1l	12	480	
10189-200000	gloss	1l/5l	12/4	480/128	GE10



## Refresh

Wipe care product for cleaning and maintaining finished and oiled surfaces.

- Universal product for use on a variety of varnished and oiled floors
- Extremely economical concentrate
- Can also be machine applied
- Clearly visible care effect

Wood | Cork | Linoleum | PVC



DIN 18032

ART.-NO.				GISCODE
10046-200000	1l/10l	12/-	480/60	GU40



## Permanent OilCare

Layer-forming maintenance oil for all oiled surfaces.

Wood | Cork



ART.-NO.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	GISCODE
10190-000000	1l	6	480	Ö60+





## ParkettOil

Maintenance oil for non-layer-forming oil surfaces.

Wood

- Refreshes tired and worn floors
- Removes slight damage in oiled surfaces
- Ideal for full-surface care or partial improvements
- Easy and safe application
- Preserves the anti-slip properties of oiled flooring

ART.-NO.				GISCODE
10461-400000	1l/5l	6/4	480/120	Ö60+



## ParkettOil Deluxe

Intensive care oil for re-impregnating non-layer-forming, oiled wooden floors.

Wood

- For maintenance of heavily leached, open-pored, oiled surfaces
- Ideal for full-surface care or partial improvements
- Specially for re-impregnation after intensive/deep cleaning

ART.-NO.	VARIANT				GISCODE
10466-200000	Transparent	1l	6	480	Ö60+



## ParkettWax

Classic care wax for oiled and waxed wooden floors.

Wood | Cork

- Protects the floor against water and dirt
- Classic floor wax
- Closes open pores in the wood
- Easy to polish

ART.-NO.	VARIANT				GISCODE
10429-400000	Transparent	1l/12l	6/-	480/50	Ö60+



## WaxRefresh

Wipe care product for cleaning and care of oiled and waxed surfaces.

Wood | Cork

- Leaves behind a thin protective wax film
- Extremely economical concentrate
- Material-protecting and pH-neutral
- Good cleaning effect
- Can be used universally on various oiled / oiled-waxed floors

ART.-NO.				GISCODE
10041-200000	1l/10l	12/-	480/60	GU73



## WaxRemover

Deep cleaner for oiled and waxed floor coverings.

- Classic intensive cleaner for oiled / waxed floors
- Also suitable for water-sensitive flooring

Wood | Cork

ART.-NO.				GISCODE
10309-400000	1l	6	480	GG0



## ParkettSoap

Water-based soap for oiled and waxed floorings.

Wood | Cork

ART.-NO.	VARIANT				GISCODE
10048-000000	Transparent	1l/5l	12/4	480/128	
10048-900126	White	1l	12	480	GU70



## NatureOil

Water-based maintenance oil for oiled parquet floors.

Wood

ART.-NO.				GISCODE
10100-000000	1l/5l	12/4	480/128	Ö10+



## NatureWax

Water-based care wax for oiled and waxed wooden floors.

Wood

ART.-NO.				GISCODE
10105-000000	1l/5l	15/4	540/128	GE10

# Cleaning and Care for the Home

Have you just beautified a private home? Everyone is satisfied, you're packing up and handing over the care instructions upon departure? That doesn't have to be the end of the business relationship! Recommend LOBA Home – for easy, gentle cleaning and care! This way, floors receive the attention they deserve, and you can continue to be there for your customers. It's that simple: with LOBA Home.





## Universal Cleaner Concentrate

Universal cleaner concentrate for all water-resistant surfaces, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Water-resistant surfaces

ART.-NO.				GISCODE
10023-000000	500 ml	12	780	GU70



## Universal Cleaner Spray

Ready-to-use spray cleaner for all water-resistant surfaces, pH-neutral.

- Ready-to-use spray
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Water-resistant surfaces

ART.-NO.				GISCODE
10042-000000	500 ml	12	780	GU40



## Cleaner for finished hardwood floors

Concentrate for cleaning finished wooden floors and all finished wooden surfaces, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Finished wood floors

ART.-NO.				GISCODE
10021-000000	500 ml	12	780	GU70



## Cleaner for oiled | waxed hardwood floors

Concentrate for cleaning oiled/waxed wooden floors and all oiled/waxed wooden surfaces, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Oiled/waxed wood floors

ART.-NO.				GISCODE
10022-000000	500 ml	12	780	GU70



## Care for finished hardwood floors

Concentrate for maintaining finished wooden floors and all finished wooden surfaces, pH-neutral.

Finished wood floors

- Ideally suited for intensive and maintenance care
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles

ART.-NO.				GISCODE
10036-000000	500 ml	12	780	GU40



## Care for oiled | waxed hardwood floors

Concentrate for maintaining oiled/waxed wooden floors and all oiled/waxed wooden surfaces, pH-neutral.

Oiled/waxed wood floors

- Ideally suited for intensive and maintenance care
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles

ART.-NO.				GISCODE
10037-000000	500 ml	12	780	GU40



## Care for resilient flooring

Concentrate for maintaining resilient flooring, pH-neutral.

All design floors (PVC, vinyl, linoleum and design flooring)

- Ideally suited for intensive and maintenance care
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles

ART.-NO.				GISCODE
10038-000000	500 ml	12	780	GU40



## Set cleaning & care for finished hardwood floors

Set for cleaning and care of finished parquet and all finished wooden surfaces, pH-neutral.

- 1 x Cleaner for finished hardwood floors (concentrate) 500 ml
- 1 x Care for finished hardwood floors (concentrate) 500 ml
- 1 x Universal Cleaner Spray 500 ml
- 1 x Cleaning & Care instruction

Finished wood floors

ART.-NO.			
10089-100000	3x 500 ml	1	400



## Set cleaning & care for oiled | waxed hardwood floors

Set for cleaning and care of oiled / waxed parquet and all oiled / waxed wooden surfaces, pH-neutral.

- 1 x Cleaner for oiled / waxed hardwood floors (concentrate) 500 ml
- 1 x Care for oiled / waxed hardwood floors (concentrate) 500 ml
- 1 x Universal Cleaner Spray 500 ml
- 1 x Cleaning & Care instruction

Oiled/waxed wood floors

ART.-NO.			
10089-200000	3x 500 ml	1	400



## Set cleaning & care for resilient flooring

Set for cleaning and care of all design floors (PVC, vinyl, linoleum and design flooring).

- 1 x Universal Cleaner Concentrate 500 ml
- 1 x Care for resilient flooring 500 ml
- 1 x Universal Cleaner Spray 500 ml
- 1 x Cleaning & Care instruction

All design floors (PVC, vinyl, linoleum and design flooring)

ART.-NO.			
10089-400000	3x 500 ml	1	400



## Set universal cleaning for all water-resistant surfaces

Set for cleaning all water-resistant surfaces.

- 2 x Universal Cleaner Concentrate 500 ml
- 1 x Universal Cleaner Spray 500 ml
- 1 x Cleaning & Care instruction

Water-resistant floors

ART.-NO.			
10089-300000	3x 500 ml	1	400



## Spray Mop Set

Mop with integrated spray function.

- Quick and easy cleaning without a cleaning bucket
- Damp mopping - ideal for wooden floors
- Includes microfiber Mop Pad and 250 ml Refill cleaning concentrate

Water-resistant floors

ART.-NO.	<input type="checkbox"/>	<input checked="" type="checkbox"/>
16250-200000	12	96



## Mop

Mop for application of LOBA cleaning and care products.

- Easy application of LOBA cleaning and care products
- Including high-quality microfiber mop pad (washable up to 60° C without fabric softener)

Water-resistant floors

ART.-NO.	<input type="checkbox"/>	<input checked="" type="checkbox"/>
16244-200000	24	360



## Spray Mop Refill

High-yield cleaning concentrate for refilling the LOBA Spray Mop.

- Easy dosing and refilling of the LOBA Spray Mop container
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Water-resistant floors

ART.-NO.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	GISCODE
10177-200000	250 ml	12	2184	GU40



## Mop Pad

Replacement cover for LOBA Spray Mop and Mop.

- High quality microfiber mop pad (washable up to 60° C without fabric softener)
- Suitable for LOBA Spray Mop and Mop

Water-resistant surfaces

ART.-NO.	<input type="checkbox"/>
16253-200000	100




## Repair Set

Set with different colors.

The solution for all smaller repairs of parquet, multi-layer parquet, laminate and cork flooring. Colors are mixable. Includes wedge scraper, hot knife, batteries and abrasive fabric.

ART.-NO.	VARIANT	
16351-000000	Various colors	1

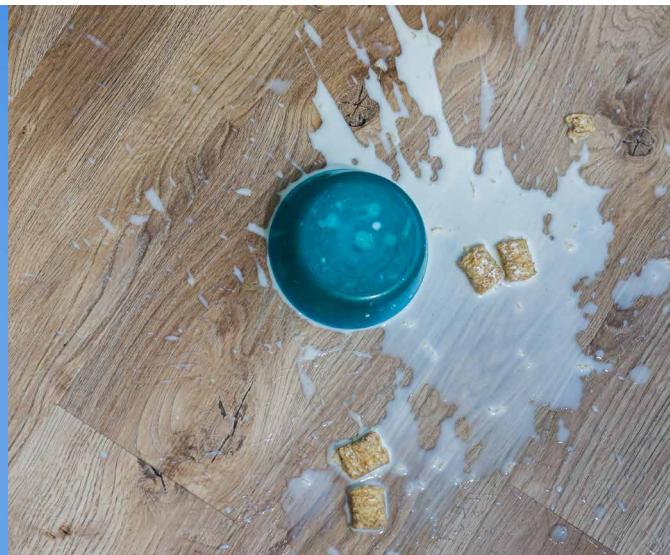

# YOUR HOME OUR PASSION


Cleaning and care for home use

Effortlessly  
clean!



## Premium quality abrasives and pads.

The various sanding phases of a new hardwood floor installation or renovation have a considerable influence on the final result. With our LOBASAND product range, we offer professionals a wide range of top-quality abrasives and pads. The high-performance materials and carrier technologies used guarantee effective working with all common machines for best results.

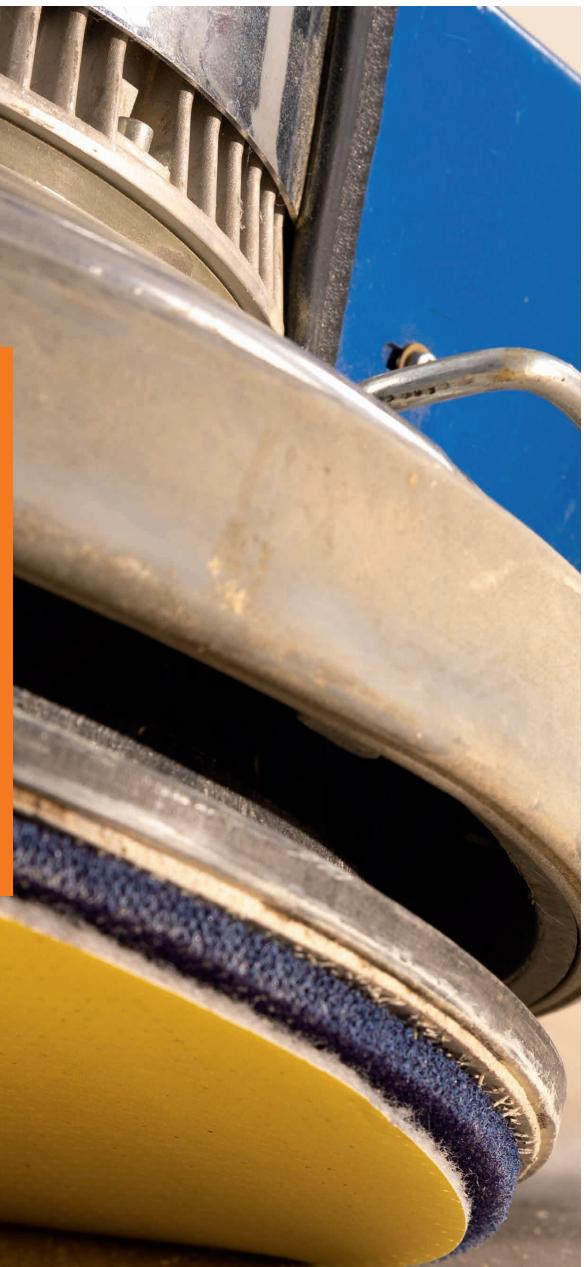

## LOBA sanding recommendations: the right combination for every purpose

### Standard sanding recommendation

For old and new hardwood floors

COARSE  
MEDIUM  
FINE  
FINAL  
SANDING  
EDGE

P40 Zircon for fast removal



P60 Ceramic for more effective removal with a long tool life



P100 Ceramic for an even sanding pattern



P100/P120 PerforatedPad with DustPad to even out sanding marks around the edges and on the surface



P40 Zircon for fast removal and P80 ceramic for more effectiveness and a fine sanding pattern



### High demands on the sanding result

For preparation for coloring or oiling

COARSE  
MEDIUM  
FINE  
FINAL  
SANDING  
EDGE

P40 Zircon for fast removal



P80 Ceramic for more effective removal with a long tool life



P120 Ceramic for an even sanding pattern



P100/P120 PerforatedPad with DustPad to even out sanding marks around the edges and on the surface



P40 Zircon for fast removal and P80 Ceramic for more effectiveness and a fine sanding pattern



### Effective for property and residential construction

For sanding hardwood floor (parallel bracing) in preparation for finishing

COARSE  
MEDIUM  
FINE  
FINAL  
SANDING  
EDGE

P50 Zircon for fast removal



P80 Ceramic for more effective removal with a long tool life



P80 PerforatedPad with DustPad



P40 Zircon for fast removal and P80 Ceramic for more effectiveness and a fine sanding pattern



## Premium | Ceramic



For the most beautiful sanding pattern and the best tool life

- Achieves the best sanding pattern
- Very long service life
- Extreme heat resistance
- Best price-performance ratio on the market, as it is very resilient
- Suitable for all surface treatments
- For sanding UV-coated floors

			Art.-no.	Dimensions	Grain size: coarse to fine									
Belt		10	17107-000...	200 x 750 mm		36	40	50	60	80	100	120		
		10	17103-250...	250 x 750 mm		36	40	50	60	80	100	120		
Hook & Loop disc 15-hole		50	17161-150...	Ø150 mm		40		60	80	100	120		180	
Hook & Loop disc		50	17159-150...	Ø150 mm	24	36	40	50	60	80	100	120		
		50	17160-200...	Ø200 mm	24	36	40	50	60	80	100	120	150	180
Hook & Loop disc Center hole		50	17160-1400...	Ø140 mm		40		60						
		50	17170-178...	Ø178 mm	24	36	40	50	60	80	100	120		

## Perfect sanding pattern with a great look!

With the LOBASAND belt, you can prepare floors perfectly for subsequent surface finishes. Whether it's a raw-wood look with 2K InvisibleProtect that you want, or an intense effect with 2K ImpactOil, LOBASAND allows you to truly bring out the natural beauty of wooden flooring.



## Dynamic | Zircon



For fast results and high abrasion.

- Fast removal
- Highly aggressive
- Clogs less because of half-open spreading
- Good heat resistance
- 100% zirconia, unique selling proposition on the market

		■	Art.-no.	Dimensions	Grain size: coarse to fine								
Belt		10	17105-000...	200 x 750 mm	24	36	40	50	60	80	100	120	
		10	17101-250...	250 x 750 mm		36	40	50	60	80	100	120	
Hook & Loop disc 9-hole		50	17140-125...	ø125 mm			40		60	80	100	120	
Hook & Loop disc 15-hole		50	17173-150...	ø150 mm			40		60	80	100	120	180
Hook & Loop disc		50	17112-150...	ø150 mm	24	36	40		60	80	100	120	
		50	17112-200...	ø200 mm					60	80	100	120	
Hook & Loop disc centerhole		50	17112-140...	ø140 mm		36			60		100	120	
Hook & Loop disc Center hole		50	17171-178...	ø178 mm	24	36	40	50	60	80	100	120	


## Other abrasives and pads

		Art.-no.	Dimensions Grain size	Range of use	
SpecialPad beige		10	16550-406410-000	ø406 x 10 mm	Levelling
Pad for beige pad holder		25	16550-250210-000	250 x 120 x 10 mm	Levelling
HandPadSet beige +25 pads		1	16555-000000-000	85 x 135 x 10 mm	Levelling
SpecialPad green		10	16550-406420-000	ø406 x 10 mm	Thorough cleaning
Pad for pad holder green		25	16550-250310-000	250 x 120 x 10 mm	Thorough cleaning
ScrubberPad black		1	16552-406010-000	ø406 mm	Thorough cleaning
NormalPad white		10	16550-124352-000	ø406 x 10 mm	Polishing
SuperPad white		5	16551-124662-000	ø406 x 25 mm	Polishing
Polishing fleece		10	16560-000000-000	ø406 mm	Intermediate sanding
DustPad		5	17039-410000-000	ø410 mm	Dust reduction
PerforatedPad		10	17037-410...	ø410 mm 80/100/120/150/180/220	For single-disc machines (fine and intermediate sanding)
SandingGrid		10	17025-406...	ø406 mm 60/80/100/120/150/180	For single-disc machines (fine and intermediate sanding)
DoubleDisc		10	17021-000...	ø406 mm 16/24/36/40/60/80/100/120	For single-disc machines
Adhesive disc		20	17010-178000-000	ø178 mm	For circular sanding machines
Pad holder with telescopic bar		1	16553-000000-000	Extendable to 97-184 cm	Levelling and thorough cleaning
Hook & Loop strip		50	17060-000240-000	81 x 133 mm 240	Intermediate sanding
Triangle		50	17041-000...	ø80 mm 40/60/80/100	For multitools

# Show us your most beautiful floors!

We warmly invite you to participate in the LOBA Flooring Award 2026.

Starting on January 1 2026, we will be looking for the most impressive wood flooring projects in commercial and public areas worldwide. The winners can look forward to fantastic prizes that will reward their hard work!

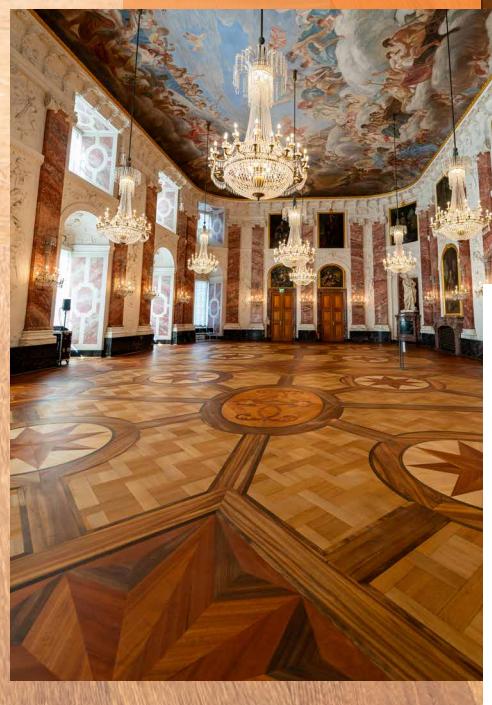

## WINNER 2025

**1st Place – Project A – ZWEIK GmbH (Germany)**

A true masterpiece!

With 42.45% of the votes, ZWEIK GmbH from Hockenheim takes 1st place – impressing with the stunning floor renovation of the Knights' Hall at Mannheim Palace. Historic atmosphere, craftsmanship at its finest, and a result that sets new standards.

Congratulations on this outstanding achievement!





## Tools and accessories – only the best for professionals!

Since tools are effectively an “extended arm of the craftsman”, they are hugely important. You can expect the best from LOBA in this field, too: We extensively test every applicator and every tool before adding them to our range. Our uncompromising quality standards provide the certainty of being able to work easily, safely and fast in tough everyday situations on the construction site.





## Roller Deluxe 120

Ensures the recommended quantity (approx. 120 g/m<sup>2</sup>). No roller frame included.

ART.-NO.	DESCRIPTION	
16234-000000	25 cm roller	12



## Roller Microfibre 100-120

For all LOBA water-based finishes as well as the primers EasyPrime and VivaPrime. Application quantity between 100-120 g/m<sup>2</sup>. No roller frame included.

ART.-NO.	DESCRIPTION	
16236-000000	25 cm roller	12



## Roller Universal 100

For LOBA Rush as well as LOBA primers PrimaSeal Plus. Application quantity approx. 100 g/m<sup>2</sup>. No roller frame included.

ART.-NO.	DESCRIPTION	
16233-000025	25 cm roller	12



## Oil roller Microfibre 60-80

For the roller application of oils (LOBA oils and 2K Intensive). Applied quantity: 40-60 g/m<sup>2</sup>. No roller frame included.

ART.-NO.	DESCRIPTION	
16236-100000	25 cm roller	12



## Small roller for edges

Roller for edges and other hard-to-reach areas.

ART.-NO.	DESCRIPTION	
16237-000000	10 cm roller	10



## Roller frame, roller extension

Roller frame: for finish rollers.  
Telescopic bar: roller extension. Can be extended up to 2 metres.

ART.-NO.	DESCRIPTION	
16232-000000	Roller frame for 25 cm roller	20
16232-100000	Roller frame for 10 cm edge roller	20
16238-000000	Telescopic bar expandable 117-200 cm	10



## Rollerbox

Clean storage of rollers.

ART.-NO.	DIMENSIONS	
16340-000000	25 cm	50



### Oil brush

Applicator for certain LOBA products for outdoor areas.

ART.-NO.	DIMENSIONS	
16081-000021	21cm	1



### Brush with long handle

Brushes for corners, edges and other hard-to-reach areas.


ART.-NO.	DIMENSIONS	
16239-000000	60 mm	12



### Trowel

Applicator for filler products, oils, waxes, coloring systems and primers.

ART.-NO.	DESCRIPTION	DIMENSIONS	
16083-0000...	stainless steel	27 cm/35 cm	6

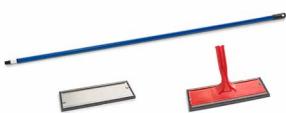

### TrimPad applicator

Applicator for 2K Contact and WPC Refresh.

ART.-NO.	DESCRIPTION	DIMENSIONS	
16274-000010	Spare TrimPad	25 cm	12
16275-000000	Telescopic bar TrimPad	-	10
16273-000010	TrimPad Applicator	25 cm	12



### Wischwiesel

Applicator with pad for water-based LOBA maintenance products. The LOBA applicator pad is a high-quality applicator head for the LOBA Wischwiesel.

ART.-NO.	DESCRIPTION	DIMENSIONS	
16247-000000	Applicator	140 cm	20
16249-000000	Applicator pad	44 cm	100



### Microfibre applicator

Application device for LOBA Stain. The replacement skin is a high-quality cover for the LOBA microfiber wiper.

ART.-NO.	DESCRIPTION	DIMENSIONS	
16242-000000	Microfibre applicator	-	960
16243-000000	Applicator pad 25cm	25 cm	1200

## Range of Use - Rollers



	OIL ROLLER	FINISH ROLLER			Applicator	TROWEL
	Micro 60-80	Micro 100-120	Universal 100	Deluxe 120	Microfibre applicator	Trowel
	ART.-NO. 16236-1	ART.-NO. 16236	ART.-NO. 16233	Artikel-NO. 16234	ART.-NO. 16234	ART.-NO. 16083
<b>EasyPrime</b>	-	✓	✓	-	-	✓
<b>VivaPrime</b>	-	✓	✓	-	-	✓
<b>PrimaSeal Plus</b>	-	-	✓	-	-	-
<b>Stain</b>	-	-	-	-	✓	-
<b>2K Contact</b>	✓	-	-	-	-	✓
<b>StyleBase</b>	-	✓	✓	-	-	-
 <b>EasyFinish Neo</b>	-	✓	-	✓	-	-
<b>EasyFinish</b>	-	✓	-	✓	-	-
<b>Viva</b>	-	✓	-	✓	-	-
<b>Speed</b>	-	-	-	✓	-	-
<b>Life</b>	-	✓	-	✓	-	-
<b>2K InvisibleProtect</b>	-	-	-	✓	-	-
<b>2K Supra A.T.</b>	-	✓	-	✓	-	-
<b>2K Resist</b>	-	-	-	✓	-	-
<b>2K Duo</b>	-	✓	-	✓	-	-
<b>2K Drive</b>	-	✓	-	✓	-	-
<b>2K Fusion</b>	-	✓	-	✓	-	-
<b>2K UltraElastic</b>	-	✓	-	✓	-	-
<b>SportFinish</b>	-	✓	-	✓	-	-
<b>2K UltraSport</b>	-	✓	-	✓	-	-
<b>2K Style</b>	-	✓	-	-	-	-
 <b>PreTone</b>	-	✓	-	-	-	-
<b>2K ImpactOil Color</b>	-	-	-	-	-	✓
<b>2K ImpactOil transparent</b>	✓	-	-	-	-	-
<b>Akzent 100 Oil</b>	✓	-	-	-	-	✓
<b>HardwaxOil EcoPlus</b>	✓	-	-	-	-	-
<b>HardwaxOil</b>	✓	-	-	-	-	✓
<b>HardwaxOil Nature</b>	✓	-	-	-	-	✓

✓ = Can be used without restrictions

- = Use not recommended

\* = Observe technical information



## Cover 400 g

Protection covers with vapor diffusion capability made of recycled textiles (50%) and recycled paper (50%). Protection covers for newly finished or oiled wooden floors.

ART.-NO.	DIMENSIONS	
16280-000000	W 100cm, L 50m	1



## Dosing pump

Dosing pump for 10 L containers. The dosing cap extracts approx. 30 ml per push.

ART.-NO.	DESCRIPTION	
16225-000000	Depth of immersion: approx. 28,5 cm - wreath: ø 4,5 cm	25



## Mixing container

Measuring cup with scale for the measurement of partial quantities of LOBA 2K water-based finish or LOBA 2K Intensive.

ART.-NO.	DESCRIPTION	
16080-000000	For 2K sealers filling quantity 1l	120
16080-100000	For 2K Intensive filling quantity 1l	1



## Paint mixer

For the fast and mechanical stirring of colors or the mixing-in of hardening components.

ART.-NO.	DIMENSIONS	
16254-000000	ø 60 mm, length 35 cm	10



## ShoeGaloshes

Made of fabric. 10 pairs in a clam pack. Absorbent and anti-slip. To be put on during final inspections, site inspections, oiling parquet flooring, cleaning flooring, etc.

ART.-NO.	
16422-001196	10



## Spray can

Simple application of cleaning and maintenance products.

ART.-NO.	DESCRIPTION	
16310-000000	filling quantity 1l	1



## Coating bucket, bucket liner

Bucket with lid and measuring scale. PE liners for the coating bucket.

ART.-NO.	DESCRIPTION	
16099-000000	Bucket filling quantity 18l	1
16218-000000	Bucket liner	25



## Wiping cloth

Ideally suited to wipe up excess material after oil application. Highly absorbent cloth with long lifetime. The product can also be used for cleaning tools and machines.

ART.-NO.	<input type="checkbox"/>	<input type="checkbox"/>
16421-100000	10	1000



## Thermo-hygrometer

For measuring ambient temperature and relative humidity.


ART.-NO.	<input type="checkbox"/>	<input type="checkbox"/>
16230-200000	1	



## Canister opener

Convenient tool for opening LOBA canisters. Especially helpful for opened canisters.

ART.-NO.	<input type="checkbox"/>	<input type="checkbox"/>
16219-000000	1	

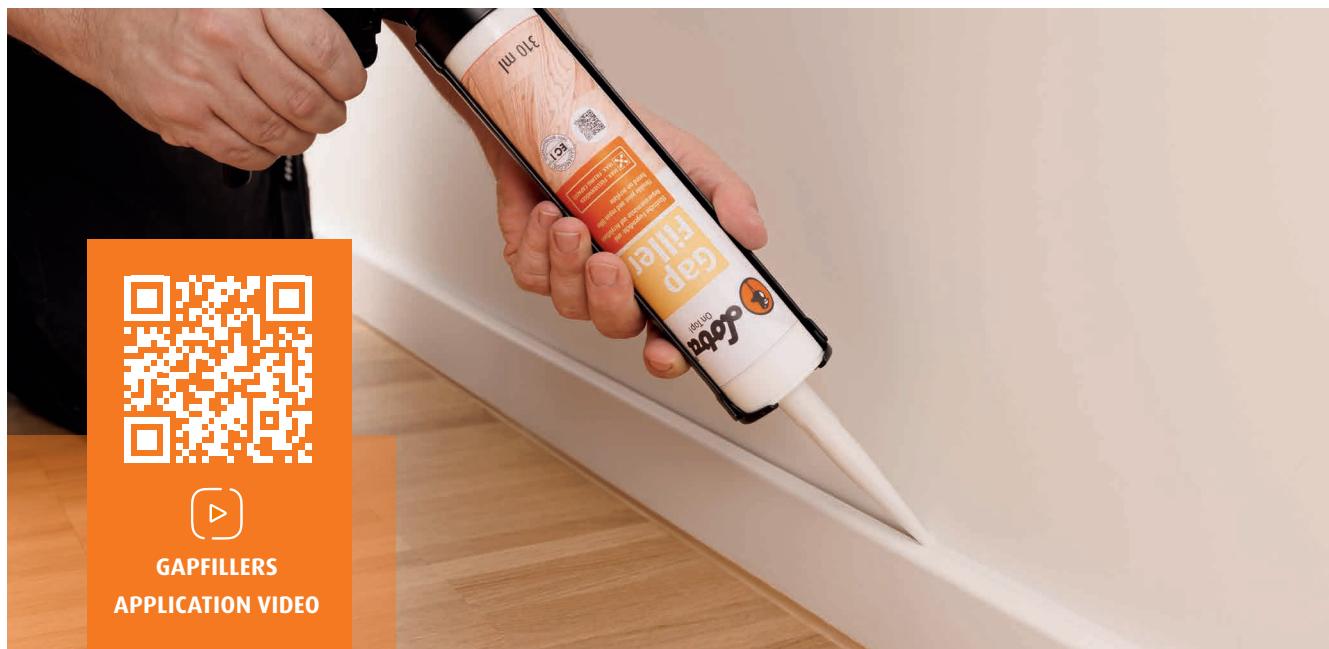

## GapFiller

ART.-NO.	VARIANT			GISCODE
16227...	Various colors	310 ml	12	D1



Maple



Beech



Oak



Light oak



Grey




Mahogany



Silver



Walnut



White

Color samples are not binding



## Cork stripes

ART.-NO.	DESCRIPTION	DIMENSIONS	
16043-290010	mocca	915 x 10 x 22 mm	36
		915 x 10 x 10 mm	
16042-291510	nature	915 x 10 x 14 mm 915 x 10 x 22 mm	80/60/36

# Workshops and trainings

Through numerous trainings conducted at our company headquarters, or in your region, we will enable you to make the very best use of our products. With LOBA, you have a reliable partner by your side who will help you inspire your customers and boost your success as a flooring specialist or interior designer.



PLEASE FIND OUR  
TRAINING DATES HERE.  
BOOK YOUR SEMINAR  
TODAY!

# Our stress levels at a glance

**The new stress levels defined by LOBA help you find the perfect finish for the types of stress your project will be exposed to.**

Our teams in the Application Technology and Research & Development departments continuously test LOBA products in order to ensure consistent quality and develop our products further on the basis of new requirements defined by our customers as well as laws and regulations. The tests are extremely comprehensive and examine numerous properties.

Four test categories were chosen that most strongly represent the overall resistance of the finishes:

- **Single scratch**
- **Abrasion**
- **Wear**
- **Chemical resistance**

1K and 2K finishes are evaluated on the basis of laboratory values in the respective categories on a scale of 1 – 10, and a mean value is also calculated from this.

2K Duo	
Single scratch	9
Abrasion	10
Wear	9
Chemical resistance	9
Mean value	9.3 -> 9

Beanspruchung | Stress level



Calculation example using 2K Duo

As shown on the product



## Explanation of symbols



EMICODE® EC1 PLUS:  
Very low emissions



Suitable for children's toys  
according to DIN EN 71-3



EMICODE® EC1:  
Very low emissions



Emissions-tested  
construction product, Class M1



EMICODE® EC2:  
Low emissions



Emissions-tested  
Construction product compliant  
with DIBt principles



Eco-friendly and  
low-VOC product



Connected Systems: System guarantee for LOBA sealing products and oils for Wakol adhesive and levelling compounds



Non-slip according to DIN  
51097 evaluation group A



Non-slip according to DIN  
51097 evaluation group B



Non-slip according  
to DIN 51130  
evaluation group R9



Non-slip according  
to DIN 51130  
evaluation group R10



Non-slip according  
to DIN 51130  
evaluation group R11



Consumption in liters



Container size



Pallet unit



Consumption in grams



Packaging unit

# GISCODE key

<b>W1</b>	Water-soluble surface treatment agents, solvent-free
<b>W2+</b>	Water-soluble surface treatment agents, solvent content up to 5%, N-methylpyrrolidone-free
<b>W2/DD+</b>	Water seal with hardener containing isocyanate, solvent content up to 5%, N-methylpyrrolidone-free
<b>W3+</b>	Water seal, solvent content up to 15%, N-methylpyrrolidone-free
<b>W3/DD+</b>	Water seal with hardener containing isocyanate, solvent content up to 15%, N-methylpyrrolidone-free
<b>Ö10+</b>	Oils / waxes, solvent-free, butanoxime-free
<b>Ö10/DD+</b>	Oils / waxes, solvent-free, oxime-free, with hardener containing isocyanate
<b>Ö20+</b>	Oils / waxes, low-solvent, de-aromatized, oxime-free
<b>Ö40+</b>	Oils / waxes, contains solvents, de-aromatized, oxime-free
<b>Ö40/DD+</b>	Oils / waxes, contains solvents, de-aromatized, oxime-free, with hardener containing isocyanate
<b>Ö60</b>	Oils / waxes, containing high amounts of solvent (> 15%), de-aromatized
<b>GE10</b>	Emulsions / dispersions (contain surfactants)
<b>GE20</b>	Emulsions / dispersions, contains solvents (5% - 15%)
<b>GG0</b>	Basic cleaner, other
<b>GG10</b>	Basic cleaner, solvent-free, not labelled
<b>GG60</b>	Basic cleaner, irritant, contains solvents, with H-substances (aminoethanol, butyl glycol, ethanediol, N-methylpyrrolidone)
<b>GG80</b>	Basic cleaner, caustic, contains solvents
<b>GU40</b>	Maintenance cleaner, solvent-free (contains surfactants)
<b>GU50</b>	Maintenance cleaner, contains solvents without H-substances
<b>GU70</b>	Maintenance cleaner, solvent-free, irritant
<b>GU73</b>	Maintenance cleaner, solvent-free, irritant (including severe eye damage)
<b>GU83</b>	Maintenance cleaner, contains solvents, irritant (including severe eye damage)
<b>G1</b>	Basic sealant and wood putty with high solvent content, de-aromatized and free of substances with a low boiling point (solvent content > 15%)
<b>G2</b>	Basic sealant and wood putty with high solvent content, de-aromatized and containing substances with a low boiling point (solvent content >15%)

## Website features



### CONSUMPTION CALCULATOR

Don't worry about the right order quantity – we'll take care of it. Enter the specifications and we'll tell you how much you need for your project!

### INSPIRATION & APPLICATION

Are demanding customers or specific tenders posing a challenge for you? You'll find ideas and background information here.

### REFERENCES

Are your customers looking for inspiration? You've come to the right place! Let them browse through our references and collect ideas.

Do you also have a great project and would like to present it together with your company on the LOBA website?

**Upload your project pictures!**





**LOBA GmbH**  
Leonberger Strasse 56-62  
71254 Ditzingen Germany  
[service@loba.de](mailto:service@loba.de)  
[www.loba.de](http://www.loba.de)

Find your LOBA contact:



 This catalog was printed  
on paper from sustainable  
forestry with inks based  
on organic oil.



Mitglied der  
**DGNB**  
Deutsche Gesellschaft für Nachhaltiges Bauen  
German Sustainable Building Council

Deutsche Gesellschaft für Nachhaltiges Bauen  
German Sustainable Building Council

